

SYSTEM DATA SHEET

PORPLASTIC *SB economic*


Elastic base mat with coloured spray coating for competition, water-permeable

RELIABLE AND LONG-LASTING



WA certified

spray-coating

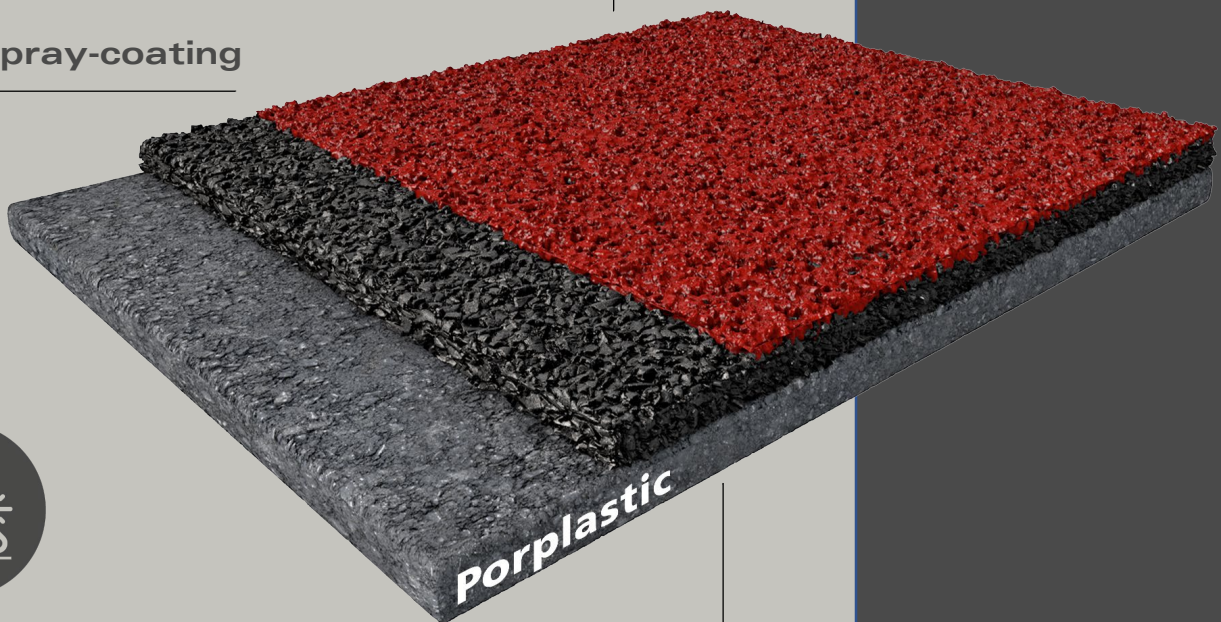

Available in many colors

Application fields

Running tracks

Run up tracks

Short distance tracks

Athletic sport areas Typ B, C

International competitions

Sport fields

Ideal for revitalisation and renovation

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg





Tel. 07472 94 999-0

Fax 07472 94 999-39













info@viacor.de

www.viacor.de


Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT (optional) PORPLASTIC X8090 	20 – 30 g/lfm	ca 0,1 – 0,2 mm	Spray
UV-SEALER PORPLASTIC S6020 (SR)	ca 0,17 – 0,2 kg/m ² per Layer	0,1 – 0,2 mm	Spray, in 2 layers
SPRAY COATING (structural) PORPLASTIC S670/S675 PORPLASTIC EPDM (0,5-1,5) + POWDER 	ca 1,2 kg/m ² ca 0,8 kg/m ² ca 0,1 kg/m ²	ca 1 - 2 mm	Spray, in 2 layers
ELASTIC LAYER PORPLASTIC T770 PORPLASTIC SBR (1-4mm) 	1,4 – 1,8 kg/m ² 7,5 – 10 kg/m ²	11 – 15 mm	Paving-Machine
PRIMER PORPLASTIC P270 	0,15 – 0,2 kg/m ²	ca 0,1 mm	Roll or Spray

Performance-Check

-  **WA-certified**
12,2 mm
-  **shock absorption of 41%**
-  **elongation at break of 46%**
-  **tensile strength of 0,47 N/mm²**
-  **friction of 51**
-  **spike resistant**
-  **Vertical deformation of 2,3 mm**
-  **Environmentally friendly**
-  **available in many colours**
-  **water permeable**
-  **anti-skid granulated surface**
-  **tested according EN 14877 and DIN 18035-6**

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

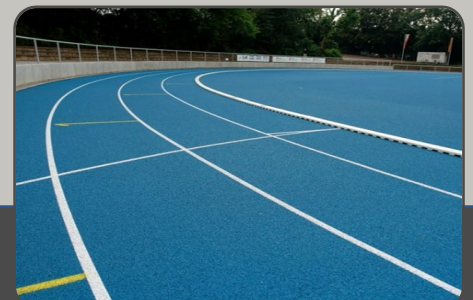

Manufacturer: