

PORPLASTIC *ACTIVE* *track*

Elastic Outdoor-Flooring-System: excellent shock absorbance for joint-friendly running



Non- skid

Permanent
elasticity



Many colours

Application fields

Bike-Tracks


Running and fun tracks

Pump-Tracks

Roller-Blading-Tracks

Porplastic

The sports brand by **viacor.**

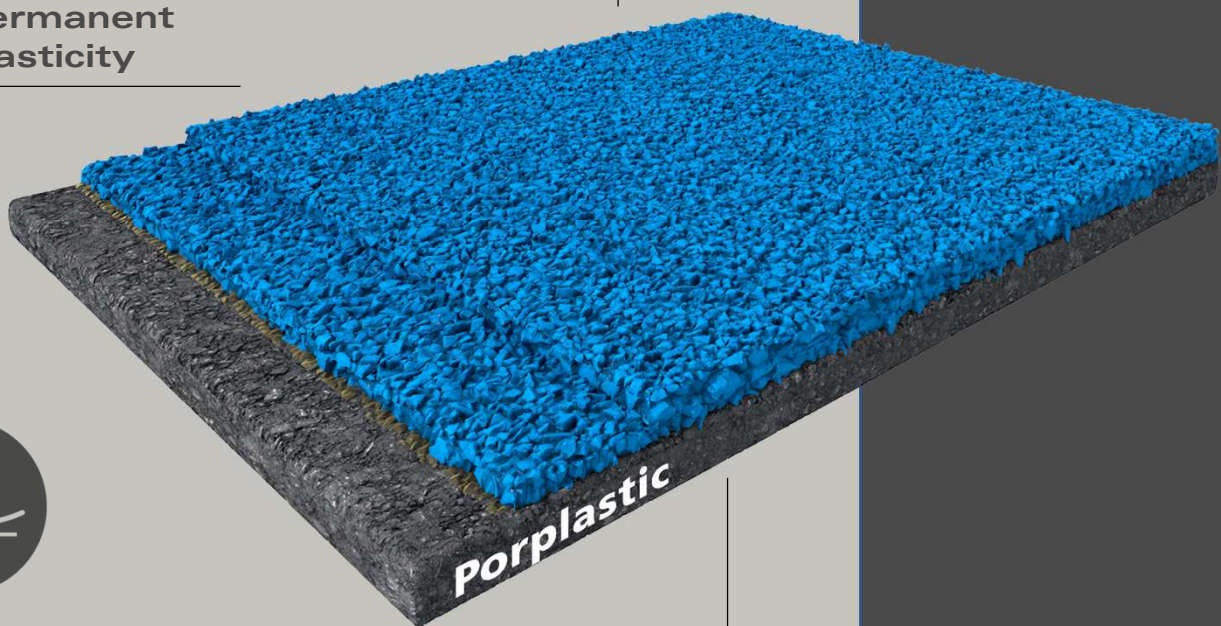

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT (optional) PORPLASTIC X8090 	20 – 30 g/lfm	0,1 mm	Spray
UV-SEALER (optional) PORPLASTIC S6020 (SR) 	0,17 – 0,2 kg/m ² per layer	0,1 – 0,2 mm	Spray, in 2 layers
WEARING LAYER PORPLASTIC C570 PORPLASTIC EPDM (1-3,5mm) 	ca 2,5 kg/m ² ca 4,0 kg/m ²	5 mm	Paving-Machine
ELASTIC LAYER PORPLASTIC C570 PORPLASTIC EPDM (1-3,5mm) 	ca 3,0 kg/m ² ca 5,0 kg/m ²	5 mm	Paving-Machine

Performance-Check



Water impermeable



jointless system

non skid, structured
surface

available in many colours

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

