

PORPLASTIC FUN 100


elastic and decorative surfaces for playgrounds, critical fall height 2,70 m

JOINTLESS AND DECORATIVE- PROTECTION FOR VERY BIG FALL HEIGHTS



Critical fall height = 2.70m

jointless

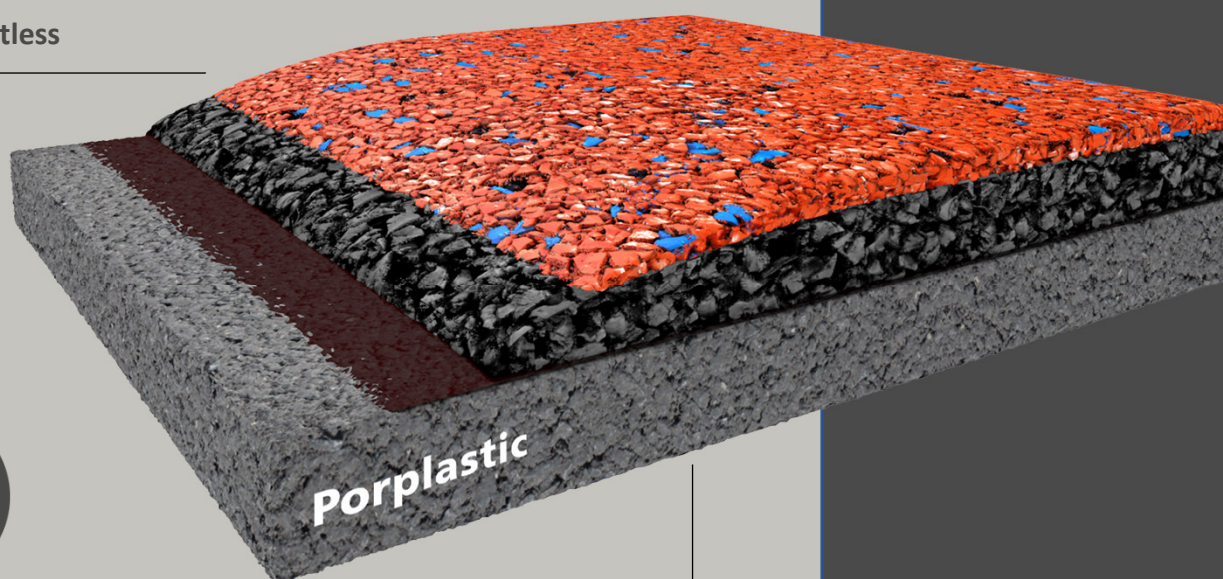

Creative use of colors

Application fields

Play zones in schools

Leisure parks

playground with high monkey bars, climbing frames and swings

Porplastic

The sports brand by **viacor.**



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	APPLICATION
WEARING LAYER PORPLASTIC T760/ T770 PORPLASTIC EPDM (1-4mm) 	2 – 3 kg/m ² 10 – 15 kg/m ²	10 – 15 mm	Manuel or paving machine
HIGHLY ELASTIC LAYER PORPLASTIC T770/ T776 PORPLASTIC SBR (2-8mm) 	ca. 5,4 kg/m ² ca 57 – 60 kg/m ²	ca. 90 mm	Manuel or paving machine
PRIMER PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray
PRIMER PORPLASTIC P274 (for concrete) 	0,1 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray

Performance-Check



available in many colours



easy to care with high pressure stream heater



excellent shock absorption when fall



UV-sealer recommended



jointless



thickness of system 100 – 105 mm

critical fall high
2,70 mtested according DIN EN
1177:2018

water-permeable



Weather resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice



Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de