

PORPLASTIC FUN 80


elastic and decorative surfaces for playgrounds, critical fall height 2,10 m

SAFE AND ATTRACTIVE PLAY ZONE- WITHOUT STUMBLING OR TRIPPING



Critical fall height = 2.10m

jointless

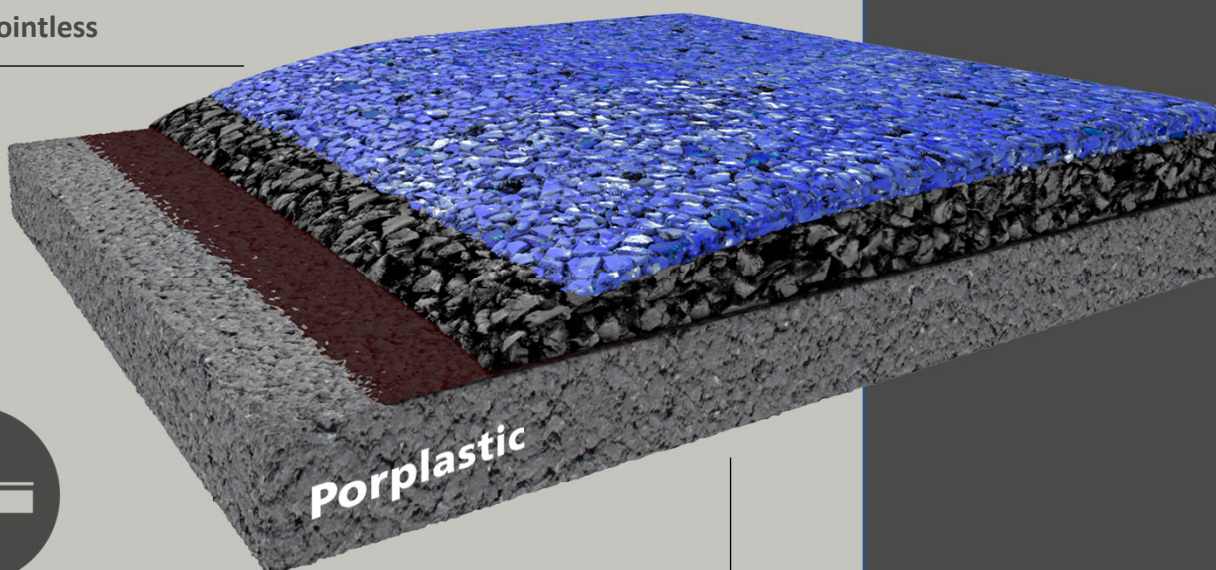

Creative use of colors

Application fields

Play zones in schools

toddler zones in open-air baths

Playgrounds with climbing frames, swings and monkey bars

walkways in kindergartens or schools

Play-scapes

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	APPLICATION
WEARING LAYER PORPLASTIC T760/ T770 PORPLASTIC EPDM (1-4mm) 	2 – 3 kg/m ² 10 – 15 kg/m ²	10 – 15 mm	Manuel or paving machine
HIGHLY ELASTIC LAYER PORPLASTIC T770/ T776 PORPLASTIC SBR (2-8mm) 	ca. 4,2 kg/m ² ca 44 – 47 kg/m ²	ca. 70 mm	Manuel or paving machine
PRIMER PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray
PRIMER PORPLASTIC P274 (for concrete) 	0,1 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray

Performance-Check



available in many colours



easy to care with high pressure stream heater



excellent shock absorption when fall



UV-sealer recommended for sensitive colours



jointless



thickness of system 80 – 85 mm



critical fall high 2,10 m



tested according DIN EN 1177:2018



water-permeable



Weather resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice



Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de