



VIACRETE MF standard SR UV

High grade slip resistant, seamless, odourless, solvent free polyurethane concrete flooring system with excellent chemical and thermal resistance and textured glossy finish, UV and color stable.

Application fields

- Wet processing zones
- Dairy production
- Fisheries and seafood processing
- Poultry and meat processing
- Commercial kitchens
- Foodstuff preparation
- Beverage production

System build-up

- VIASOL UREA S6400 P**
 SEALER
- VIACRETE PU-MF**
 WEAR COAT
- VIACRETE PU-SC**
 PRIMER





System highlights

4.0 - 6.0 mm System thickness

- | | | |
|--|---|--|
| <ul style="list-style-type: none"> HACCP-certified ISEGA certified for handling of foodstuff Low emission acc. AgBB and other standards | <ul style="list-style-type: none"> Seamless finish High abrasion resistance Low odor | <ul style="list-style-type: none"> High impact resistance Early water resistant Slip resistant surfaces R10 - R13 |
|--|---|--|

System pictures

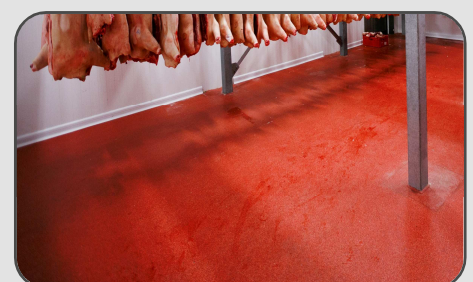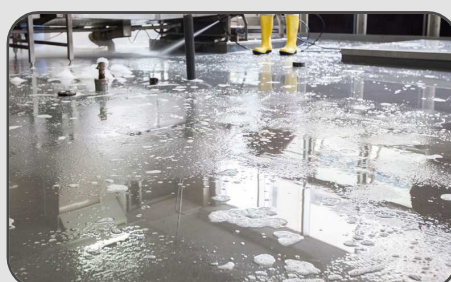



VIACRETE MF standard SR UV

Application and Consumption

Layer	Product	Consumption (kg/m ²)	Sand broadcasting (kg/m ²)	Thickness (mm)	Application
Sealer, UV stable	VIASOL UREA S6400 P	0.75 – 1.2	none	0.5 – 0.7	Rubber squeegee, paint roller
Wear coat, broadcasted with quartz or other	VIACRETE PU-MF	4.0 – 7.6	QS (0.3-0.8 or 0.6-1.2 mm) or granite In excess	3.5 – 5.5 (broadcasted)	Pin rake, notched rake
Optional: Levelling layer	VIACRETE PU-SC	ca. 1.65 per mm	none	1.0 – 2.0	Squeegee, notched rake
Primer	VIACRETE PU-SC or others	ca. 0.8 – 1.0	Optional: QS (0.3-0.8 mm) ca. 0.5 – 0.8	ca. 0.5	Trowel, rubber squeegee
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength ≥ 1.5 N/mm ² . VIACRETE can be laid on 7-day old concrete (this to a residual moisture content of approx. 6-8% (CM)) or on 2 - 3 days old polymer-modified cement screed. For permanent rising water, please contact our technical service. Substrates with moisture from the backside special measures must be taken or a damp-proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

Technical data

Property	Standard	Result
Slip resistance QS 0.3-0.8 mm QS 0.6-1.2 mm QS 0.3-0.8 mm QS 0.6-1.2 mm Granite 1 – 2 mm	TRRL Pendulum test	dry > 100, wet > 25 dry > 100, wet > 41
	DIN 51130	R10 (sanded), R11 R12 V4-V6 R12 V10, R13 V10
Shore Hardness	EN ISO 868	D 75 after 28 d
Impact resistance	EN 13813	≥ 4 Nm (IR4)
Temperature resistance		- 5 °C - + 60°C (3-4 mm) -15°C - + 70°C (5-6 mm)
Coefficient of thermal expansion	ASTM C531	$5.8 \times 10^{-5}/^{\circ}\text{C}$
Wear resistance (Taber)	EN ISO 5470-1	≤ 25 mg
Compressive strength	EN 196 / ASTM C109	ca. 45 - 49 N/mm ²
Flexural strength	EN 196 / ASTM C109	ca. 20 N/mm ²
Tensile strength	EN 196 / ASTM C109	ca. 10 N/mm ²
Adhesive strength	EN ISO 4624	min. 1,5 N/mm ² (depending on substrate quality)
Fire behaviour	EN 13501-1	B _{fl} -s1

Remark: For further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice VIACOR products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies which can be obtained on request.

Manufacturer: