

# VIASOL DECK M rapid



(Former VIASOL DECK rapid M V1)


Fast curing car park deck coating system with manually applied waterproofing membrane (highly dynamically crack-bridging acc. IV<sub>T+V</sub> and B4.2 at -20°C) and with combined „ready-to-use“ wear coat. For multi storey car parks with intermediate decks as well as roofed sidewalks on bridges with pedestrian and vehicle traffic. Acc. to 1) DIN EN 1504-2 and DIN V 18026; 2) RILI SIB 2001, class OS10; 3) DIN 18532 Part 1 and 6.

## Application fields

- Intermediate decks with car traffic
- Underground car parks and ramps
- Roofed sidewalks on bridges

## System build-up

- VIASOL UREA S6400 P  
LINE MARKING
- VIASOL UREA S6001 P  
WEAR COAT
- VIASOL PU-L2000  
WATERPROOFING MEMBRANE
- VIASOL EP-T703  
PRIMER

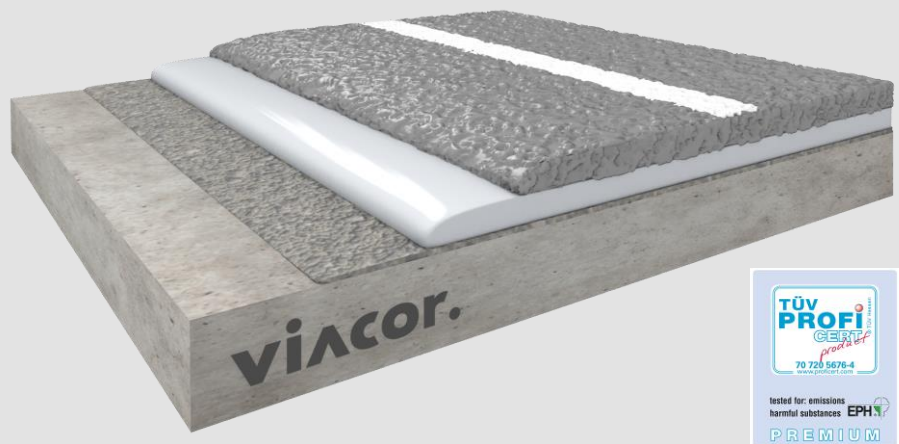

## System highlights

3.5 – 4.5 mm System thickness

- Highest abrasion resistance
- Good chemical resistance against gasoline, diesel, de-icing salt and others
- Dynamic crack bridging class B4.2, IV<sub>T+V</sub> at -20°C
- Seamless
- Slip resistant surface for car and pedestrian traffic R11, V10
- BPA free
- Plasticizer-free acc. to VdL-Richtlinie 01
- Fast and low temperature curing
- Highest wear resistance acc. to Parking Abrasion Test and others
- Low emissions acc. to AgBB and other international standards

## System pictures



# VIASOL DECK M rapid



(Former VIASOL DECK rapid M V1)

## Application and Consumption

Layer	Product	Consumption (kg/m <sup>2</sup> )	Sand broadcasting (mm)	Thickness (mm)	Application
„Ready-to-use“ wear coat, fast curing	VIASOL UREA S6001 P	2.0 – 2.7	-	1.5 – 2.0	trowel, long- handled squeegee, roller
Highly elastic waterproofing membrane, manually applied	VIASOL PU-L2000	3.0 – 3.2	-	ca. 2.0	notched trowel
Primer	VIASOL EP-T703	0.3 – 0.5	QS (0.3-0.8 mm) ca. 0.5 – 0.8	ca. 0.3	roller or rubber squeegee
Alternative: fast-curing	VIASOL EP-T703 S				
Alternative: pre-filled	VIASOL EP-P1203 or VIASOL EP-P210				
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength $\geq 1.5$ N/mm <sup>2</sup> , residual moisture content $< 4$ %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

## Technical Data

Property	Standard	Result
Adhesive strength at T <sub>NORM</sub>	DIN EN 1542	$\geq 2,7$ N/mm <sup>2</sup>
Adhesive strength after freeze-thaw with de-icing salt	DIN EN 13687-1 und -2	1.6 N/mm <sup>2</sup>
Dynamic crack bridging (-20°C)	DIN EN 1062-7	B4.2, IV <sub>T+V</sub>
Grip and slip resistance	DIN EN 13036-4 DIN 51130	$\geq 55$ Skt R11, V10
Chemical resistance	DIN EN 13529	Test liquids DiBT Nr. 1, 3, 10
Abrasion resistance (H22 wheel, 1000 cycles)	DIN ISO 9352, ASTM D 1044	$< 700$ mg
Parking Abrasion Test (PAT) with 500 kg load		VK 1 – Very low wear after 20,000 cycles
Double stroke test	DIN EN 660-1:06	Loss of mass 0.0 g
CO <sub>2</sub> permeability	DIN EN 1062-6	$> 2,500$ m
Water vapour permeability	DIN EN ISO 7783	$> 50$ m (class III)
Water absorption coefficient	DIN EN 1062-3	$< 0.01$ kg/(m <sup>2</sup> * h <sup>0,5</sup> )
Impact resistance	DIN EN ISO 6772-2	4 Nm – no cracks
Fire classification	DIN EN 13501-1 EN 13501-5	B <sub>fl</sub> -s1 B <sub>roof</sub> -t4

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue (see [www.viacor.de](http://www.viacor.de) or contact us directly) – all technical information is subject to change without prior notice

### Hersteller:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | [info@viacor.de](mailto:info@viacor.de) | [www.viacor.de](http://www.viacor.de)  
Seite 2/2 | Version Nr. 9 | Stand: 08-2024