

PORPLASTIC *INDOOR CEL* *combi*

Combined elastic sports flooring system for school and multipurpose use,
according to EN 14904, for indoor use.

*tested in the system PEL extra



EN14904 certified

TÜV PROFICERT*



Many colours

Application fields

Sports halls

School sports halls

Multi-purpose leisure halls

Porplastic

The sports brand by **viacor**.



Porplastic

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	thickness	Application
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Roller or brush
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,12 – 0,15 kg/m ²	0,1 mm	roller
SELF-LEVELLING LAYER PORPLASTIC C524 	2,6 – 3,9 kg/m ²	2 – 3 mm	Notched squeegee
PORE SEALER PORPLASTIC L375 	ca 0,6 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIKMAT + ADHESIVE PORPLASTIC PEL-Matte PORPLASTIC B976 	ca 0,8 kg/m ² (adhesive)	4 - 10 mm (Elastic mat)	Cut and embed in fresh adhesive Notched trowel
UNDER-CONSTRUCTION PLYWOOD FOAM PAD 	-	15+15 mm	Laid in plates or as roll

Performance-Check



Gloss of 32 %



rebound > 90



shock absorbtion > 55 %



Vertical deformation > 2,9 mm

abrasion resistance of
20mg

available in many colours



Water impermeable





TÜV PROFICERT IN SYSTEM PELextra



DIN EN 14904 certified

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice

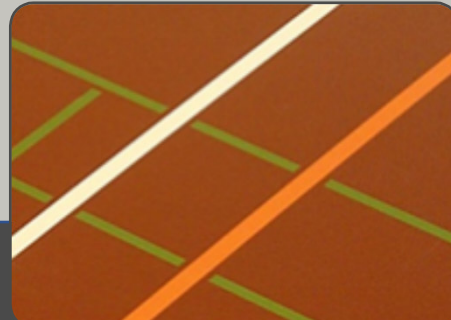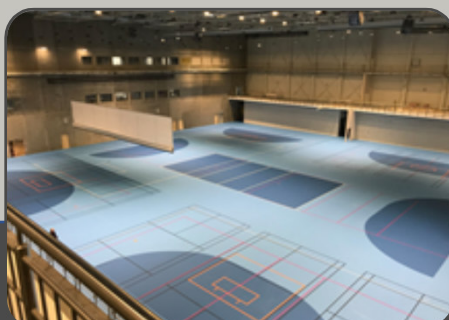

Manufacturerr:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de