

PORPLASTIC *INDOOR MEL* *compound*

Sports flooring system for school and multipurpose use, mixed elastic
according to EN 14904

*tested in system PEL extra



EN 14904 cetified

TÜV PROFICERT*



Many colours

Application fields


Sports halls

School sports halls

Multi-purpose leisure halls

Porplastic

The sports brand by **viacor**.

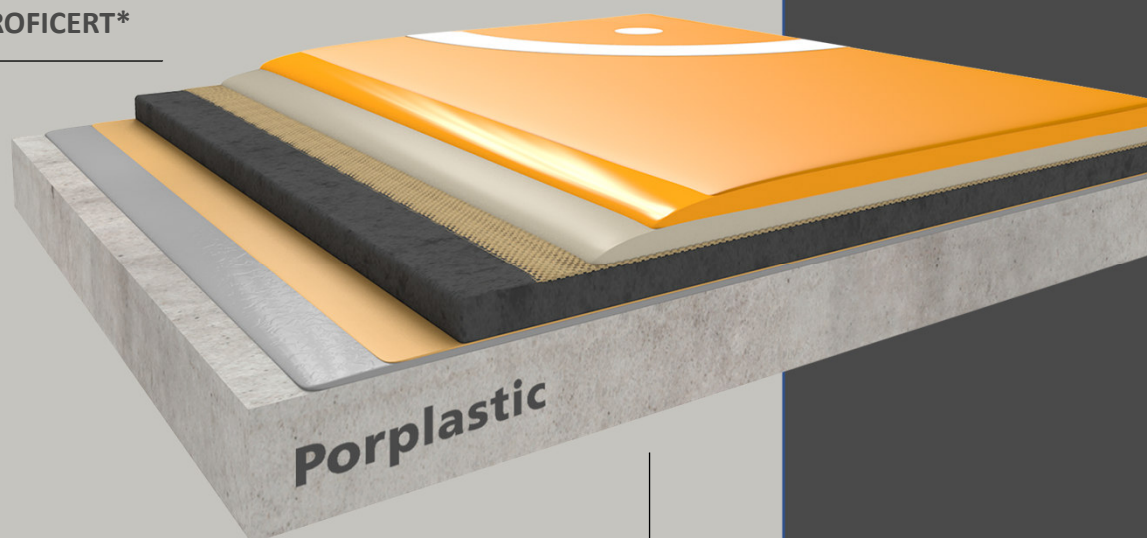

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Roller or brush
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,10 – 0,13 kg/m ²	0,05 – 0,1 mm	roller
ELASTIC LAYER PORPLASTIC C524 	2,5 – 3,0 kg/m ²	2 – 3 mm	Notched squeegee
LOAD-DISTRIBUTION PORPLASTIC 	2,0 kg/m ²	2 mm	Notched squeegee
PORE SEALER PORPLASTIC L375 	ca 1,0 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIC MAT+ADHESIVE PORPLASTIC MAT PORPLASTIC B976 	ca 0,8 kg/m ² (adhesive)	10 – 12 mm (Elastic mat)	Cut and embed in fresh adhesive, Notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check



gloss of 28-30 %



ball rebound > 99%



shock absorption of 57 %



permanent elasticity



abrasion resistance of 15mg



available in many colours



Water impermeable



impact resistance of 16Nm



sliding properties of 107

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice



Manufacturerr:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de

Page 2/2

Version No. 3

Date: 09-2026