

PORPLASTIC *INDOOR PEL* *basic*

Standard flooring system for school and multipurpose sports halls
point-elastic according EN 14904



DIN 18032-2 and
EN 14904 certified

TÜV Proficert



Many colours

Application fields


Sports halls

School sports halls

Multi purpose leisure halls

Porplastic

The sports brand by **viacor**.

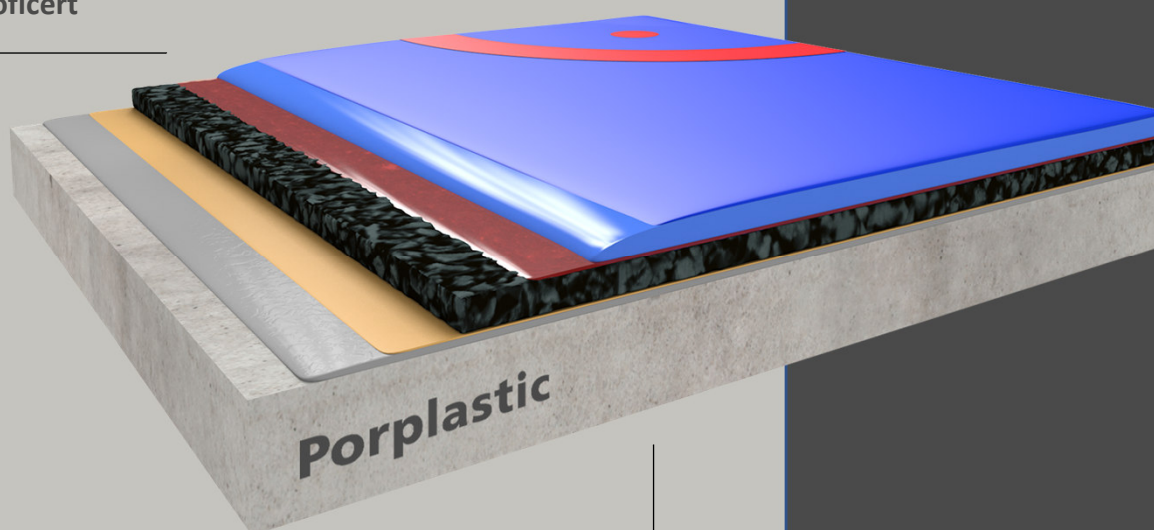

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	TOOL
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Brush or roller
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,12 – 0,15 kg/m ²	0,1 mm	roller
ELASTIC LAYER PORPLASTIC C524 	2,0 – 3,0 kg/m ²	2 – 3 mm	Pin rake
SELF-LEVELLING LAYER PORPLASTIC C524 	0,4 – 0,8 kg/m ²	ca 0,5 mm	Rubber squeegee
PORE SEALER PORPLASTIC L375 	ca 0,3 – 0,7 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal towel
ELASTICMAT+ADHESIVE PORPLASTIC MAT ^(basic) PORPLASTIC B976 	ca 0,8 kg/m ² (Adhesive)	4 – 10 mm (Elastic mat)	Cut and embed in fresh adhesive, notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check



gloss of 23 %



vertical ball behavior >96%



shock absorption 17-30 %



permanent elasticity



resistance to wear of 30mg



Available in many colours



Water impermeable

impact resistance of
9 – 13 Nm

sliding coefficient of 100

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) - all technical information is subject to change without prior notice

