

PORPLASTIC *SW competition* – great tournaments

Sandwich construction consisting of an elastic layer, pore sealer and cast coating spread with coloured EPDM-granules, water-impermeable

SYSTEM LAYERS

line paint:

PORPLASTIC X8090

UV-sealer (optional):

PORPLASTIC S6020

structured cast coating (ca. 3 – 5 mm)

PORPLASTIC C570 spread with
PORPLASTIC EPDM 1 – 4 mm

pore sealer (ca. 0.1 mm):

PORPLASTIC L370
(PORPLASTIC C570 + rubber powder)

elastic layer (ca. 10 – 12 mm):

PORPLASTIC T770 / T776 with
PORPLASTIC SBR 1 – 4 mm

primer (optional):

PORPLASTIC P270 for asphalt
VIASOL EP-P210 for concrete, curbs, small areas

bound sub-base (asphalt):



SYSTEM DESCRIPTION

- total system thickness approx. 13 - 17 mm
- certified in accordance with WORLD ATHLETICS
- tested according to DIN 18035-6, EN 14877 and ASTM F2157-09
- fulfils requirements of AgBB for VOC emission
- water-impermeable
- sandwich-construction
- extremely spike-resistant
- structured surface
- excellent conditions even when wet or raining
- available in many colours

PORPLASTIC *SW competition*


APPLICATION AND CONSUMPTION

layer	product	consumption (kg/m ²)	thickness (mm)	application
line paint	PORPLASTIC X8090	20-30 g/lfm	.01 – 0.2	spray
UV-sealer (optional)	PORPLASTIC S6020	0.17 – 0.20 per layer	0.1 – 0.2	spray, in 2 layers
structured cast coating	PORPLASTIC C570	2.2 – 2.8	3 – 5	notched squeegee
	PORPLASTIC EPDM (1 – 4 mm)	2.8 net 4.0 total		broadcast, remove excess
pore sealer	PORPLASTIC L370 (PORPLASTIC C570 + rubber powder)	1.1 – 1.8	0.1 – 0.2	squeegee or paving-machine with trowel-bar
elastic layer	PORPLASTIC T770 or T776	1.2 – 1.5	10 – 12	paving-machine
	PORPLASTIC SBR (1 – 4 mm)	6.5 – 7.7		
Primer (optional)	PORPLASTIC P270 for asphalt	0.15 – 0.2	ca. 0.1	roll or spray
	VIASOL EP-P210 for concrete, curbs, small areas	ca. 0.5	ca. 0.4	roll



FIELDS OF APPLICATION

- athletic sports areas type A + B + C
- short distance running tracks
- Running/run -up tracks for use in mass sports and competitions

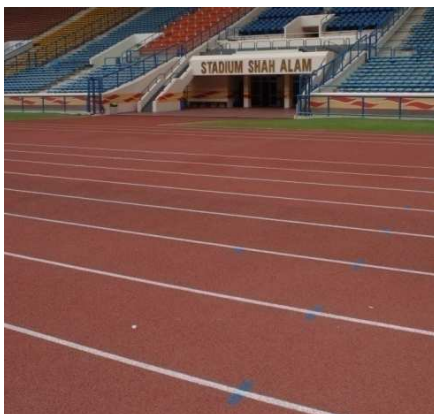

TECHNICAL DATA

properties	test norm	result	requirement
tensile strength	WORLD ATHLETICS EN 14877	0.68 N/mm ²	≥ 0.5 N/mm ²
		0.52 N/mm ²	≥ 0.4 N/mm ²
elongation at break	WORLD ATHLETICS EN 14877	43 %	≥ 40 %
		43 %	
shock absorption (23°C)	WORLD ATHLETICS EN 14877	40 %	35-50 %
		31 %	25-50%
vertical deformation (23°C)	WORLD ATHLETICS EN 14877	1.7 mm	0.6-2.5 mm
		1.5 mm	≤ 3.0 mm
thickness	WORLD ATHLETICS EN 14877	15.3 mm	≥13 mm (WA)
		13 mm	≥10 mm (EN)
friction	WORLD ATHLETICS EN 14877	56	>47
		dry: 82	80-110
		wet: 85	55-110
resistance to wear	EN 14877	1.62 g	≤ 4,0 g
ageing / color loss	EN 14877	passed / 4	pass / ≥3
spike resistance	EN 14877	Passed	pass
<u>environmental requirements</u> DOC, EOX, heavy metals, smell, chloroparaffins, phthalates) PAH		DIN 18035-6 Table A.1 ZEK 01-08	fulfilled limit values

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all PORPLASTIC data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). **Date of issue: January 2020** – all technical information is subject to change without prior notice