








VIASOL **ELASTIC UV soft**

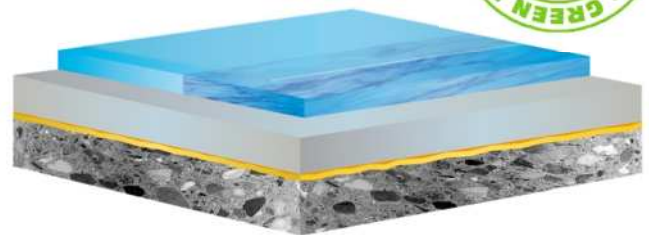
Elastic polyurethane coating system, very good UV- and colour stable, with impact noise reducing intermediate layer, gentle to knees and joints, temperature pleasing to the feet, with light to medium mechanical and chemical resistance and a wide colour spectrum.

SYSTEM BUILD-UP

-  Transparent seal coat:
VIASOL PU-S6000 or PU-S688 N
-  Self-levelling coating, UV- and colour stable
VIASOL PU-C500
-  Basic layer:
VIASOL PU-C525
-  Elastic layer
VIASOL PU-L325
-  Pore sealer, levelling coating
VIASOL PU-C525 (recommended)
-  Primer for cementitious substrates:
VIASOL EP-P203 or other
-  Substrate: concrete, cementitious screed, asphalt, wood and others

SYSTEM THICKNESS

4.0 – 8.0 mm



SYSTEM HIGHLIGHTS

- Very good UV- and colour stable
- Individual design applications possible
- Certified slip resistance
- Impact sound reduction
- Low emission tested accord. AgBB guidelines and other European standards
- TÜV-ProfiCert Premium certified

APPLICATION FIELDS

- Schools, kindergarten, universities
- Hospitals, nursing and residential homes
- Offices and public buildings
- Restaurants and canteens
- Shops, foyers and exhibition areas
- Private apartments and homes



SYSTEM BENEFITS

- Impact sound reducing up to 12 dB
- Gentle to knees and joints, durable elasticity
- Low emission tested accord. AgBB guidelines and other European standards
- Self-leveling, seamless and jointless
- High abrasion resistance, suitable for chairs with wheels
- Good chemical resistance
- Homogeneous and anti-skid surface
- Hygienic, no pores, impermeable to liquids
- Easy to clean and maintain
- Available in many colours
- Very high color and UV-stability
- Suitable for floor heating
- Fire resistance class B_{fl}-s1

Manufacturer:

VIASOL system data sheet

GREEN LINE ECO

VIASOL *ELASTIC UV soft*

APPLICATION AND CONSUMPTION

| layer | product | consumption (kg/m ²) | sand broadcasting (kg/m ²) | thickness mm | application |
|---|--|----------------------------------|--|--------------|---|
| Seal coat, flexible, transparent | VIASOL PU-S6000 | 0.10 – 0.13 | none | 0.08 – 0.10 | roller or rubber squeegee and roller |
| alternative | VIASOL PU-S688 N | 0.11 – 0.13 | | | |
| Self-levelling coating, UV- and colour stable | VIASOL PU-C500 | 2.0 – 3.0 | optional colour chips | 1.5 – 2.2 | notched trowel |
| Basic layer | VIASOL PU-C525 | 1.0 – 1.5 | none | 0.9 – 1.2 | notched trowel |
| High elastic intermediate layer | VIASOL PU-L325 | 2.0 – 6.0 | none | 2.0 – 6.0 | notched rubber squeegee or notched trowel |
| Levelling layer, (optional) | VIASOL PU-C525 | 0.6 – 1.0 | none | approx. 0.5 | notched trowel |
| Primer | VIASOL EP-P203 or others | ca. 0.4 | QS 0.3 – 0.8 approx. 0.5 | ca. 0.3 | roller or rubber squeegee |
| Substrate | Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength ≥ 1.5 N/mm ² , residual moisture content < 4 %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data. | | | | |
| Note | Detailed application instructions are available upon request or refer to the technical product data sheet. | | | | |

TECHNICAL DATA

| property | standard | result |
|-----------------------------------|---------------------------|---|
| Tensile strength(top coating) | DIN 53504 | approx.9 N/mm ² |
| Elongation at break (top coating) | DIN 53504 | approx. 60 % |
| Tear resistance | DIN 53515 | approx. 15 N/mm ² |
| Shore-Hardness | DIN ISO 868 | 80 A after 28 d |
| Way of use | In Relation to DIN EN 685 | Private buildings: 23 Public buildings: 34 |
| Impact sound reduction | DIN 4109 | ca. 8 – 12 dB |
| Impact strength | DIN EN 13813 | ≥ 4 Nm (IR4) |
| Wear resistance (Taber) | ISO 9352, ASTM D 1044 | ≤ 30 mg |
| Anti-skid properties | BGR 181 / DIN 51130 | class R9 / R10 |
| Adhesive strength | DIN ISO 4624 | >1.5 N/mm ² |
| Fire behaviour class system | EN 13501-1 | C _{it} -s1 |

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly)– all technical information is subject to change without prior notice

Manufacturer: