

VIASOL DECK 8

Park deck coating system with statically crack-bridging properties (up to class A3, -10°C). For closed multi storey car parks on intermediate decks and ramps. System following class OS 8.

Application Fields

Closed car parks and underground garages up to -10°C

Ramps and spiral ramps

System Build-up

LINE MARKING

E.G. PU OR ACRYL



VIASOL EP-S602

TOP COAT




VIASOL PU-L300 V

CRACK-BRIDGING
BROADCASTING LAYER



VIASOL EP-P210

PRIMER

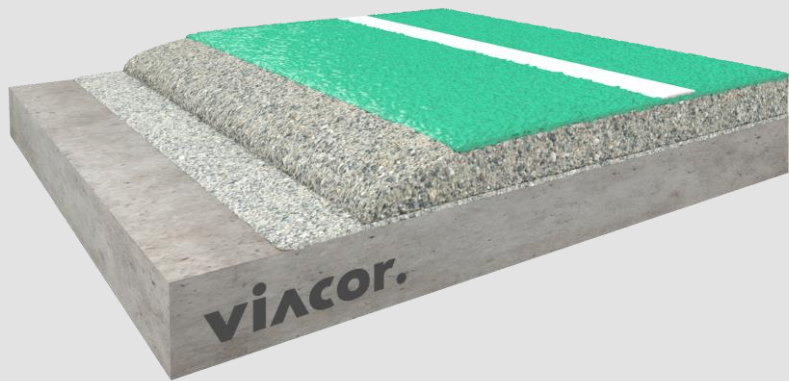

System Highlights

2,5 - 3 mm System thickness



Statically crack bridging class A3 or A2



High abrasion resistance



Chemically resistant against oils, gasoline and other



Slip resistant for pedestrian and vehicular traffic




Available in many colors



Fire resistance class Bfl-s1

System Pictures

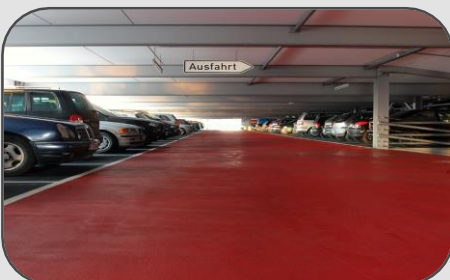

VIASOL DECK 8

Application and Consumption

Layer	Product	Consumption (kg/m ²)	Sand broadcasting (mm)	Thickness (mm)	application
Sealer	VIASOL EP-S602	0.6 – 0.9	none	0.5 – 0.7	Rubber squeegee, roller for finish
Wear coat crack-bridging	VIASOL PU-L300 V	1.3 – 1.5	QS 0.3-0.8 oder 0.6-1.2 mm In excess	min. 2.1	Notched trowel, Rubber trowel
(Alternative) wear coat highly crack-bridging	VIASOL PU-L2000	1.8 – 2.2		min. 3.6	Notched trowel
(optional) Scratch coat, levelling	VIASOL EP-T703 + QS 0.1 – 0.4 mm	0.5 – 1.5 + QS 25–150 %	QS 0.3-0.8 mm In excess	0.5 – 1.5	Notched trowel, roller for finish
Primer	VIASOL EP-T703 or others	0.6 – 0.9	QS 0.3-0.8 mm, 0.5-0.8 kg/m ²	ca. 0.3	Roller or rubber squeegee
(Optional) Blocking primer ≤ 6 % CM	VIASOL EP-P210 or EP-T703	0.4 – 0.6	none	ca. 0.3	roller or rubber squeegee
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength ≥ 1.5 N/mm ² , residual moisture content < 4 %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

Technical Data

	Property	standard	result
	Adhesive strength at T _{NORM}	DIN EN 1542	≥ 2.5 N/mm ² (≥ 1.5 N/mm ²)
	Adhesive strenght after freeze-thaw with de-icing salt	DIN EN 13687-1 and -2	2.1 N/mm ² (≥ 1.5 N/mm ²)
	Statically crack bridging (-10°C)	DIN EN 1062-7	PU-L300 V: min. 0.25 mm (A2) PU-L2000: min. 0.5 mm (A3)
	Grip and slip resistance	DIN EN 13036-4 DIN 51130	57 Skt (≥ 55 Skt) R11-V4 and R12-V6
	Chemical resistance	DIN EN 13529	Test liquids DiBT Nr. 1, 3, 10
	Abrasion resistance (H22 Rad)	DIN EN ISO 5470-1	2.100 mg /1000 U (≤ 3.000)
	CO ₂ -permeability	DIN EN 1062-6	Class III > 1.200 m (> 50 m)
	Water vapor permeability	DIN EN ISO 7783-1 and -2	Class III > 150 m (> 50 m)
	Water absorption coefficient	DIEN EN 1062-3	< 0.01 kg/m ² x h ^{0.5} (< 0.1)
	Impact resistance	DIN EN ISO 6772-2	4 Nm – no cracks
	Fire behavior class system	DIN EN 13501-1	B _f -s1

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly)– all technical information is subject to change without prior notice

Manufacturer: