

VIASOL *PERM* protective


Water-vapour permeable epoxy resin based coating system, low odour, water-proof surface with good mechanical and chemical properties for minor loads and a wide colour spectrum.

Application fields

Public buildings	Technical rooms	Garages	Production areas
Storage rooms	Cellars	Walls	Areas with moisture sensitive substrates

System Build-up

VIASOL EP-S680 2nd SEALER	
VIASOL EP-S680 1st SEALER	
VIASOL EP-P285 SCRATCH COAT	
VIASOL EP-P285 PRIMER	

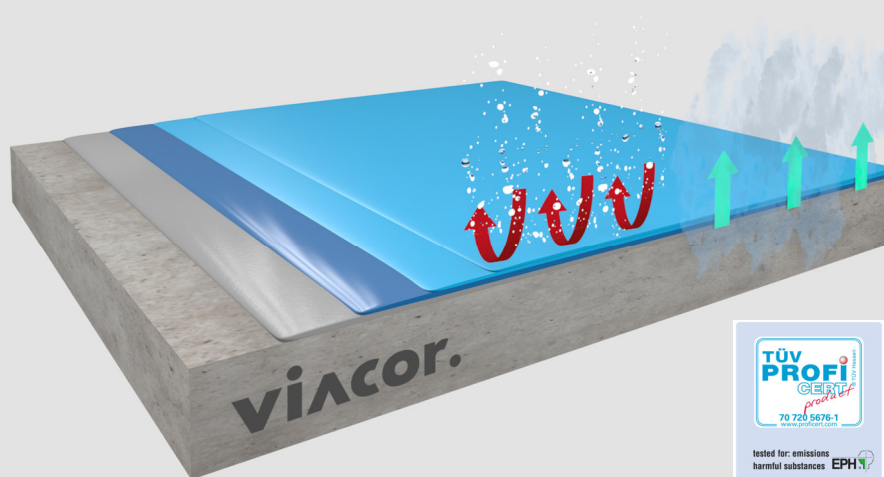

System highlights

0,2 – 0,6 mm System thickness



Highly water vapour permeable



Low-emission in accordance with the criteria of the Committee for the Health Assessment of Building Products (AgBB)



Good impact resistance



Seamless



Low odor



Good chemical resistance



Impermeable to liquids



Good abrasion resistance



B_{f1-s1} after EN 13501

System pictures




VIASOL PERM protective

Application and Consumption

Layer	Produkt	Consumption (kg/m ²)	Thickness (mm)	Application
2nd Sealer matt or semi-glossy	VIASOL EP-S680 or VIASOL EP-S681	0,25 – 0,4 + 3 - 5 % Water	0,15 – 0,2	roller, squeegee + roller
1st Sealer matt or semi-glossy	VIASOL EP-S680 or VIASOL EP-S681	0,25 – 0,4 + 3 - 5 % Water	0,15 – 0,2	roller, squeegee + roller
(optional) Scratch coat, levelling layer	VIASOL EP-P285	0,5 – 1.0 + 5 – 10 %water + 50 - 100% QS 0,1 – 0,4	0,5 – 1,5	trowel
Primer	VIASOL EP-P285	0.2 – 0.4 + 10 - 20% Water	Ca 0,1	roller, squeegee + roller
(optional) Primer	VIASOL EP-S680 or VIASOL EP-S681	0.2 – 0.4 + 7 - 10% Water	Ca 0,1	roller, squeegee + roller
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength $\geq 1.5 \text{ N/mm}^2$, this system is water vapour permeable, max. residual moisture < 6 - 8% CM, for magnesite screed <10% CM, anhydrite max. 1% residual moisture, attention for underfloor-heating <0.3% CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane should be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.			
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.			

Technical Data

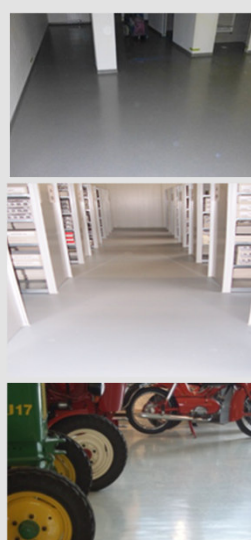	Property	Standard	Result
	Compressive strength	EN 196 / ASTM C109	Ca 55 N/mm ²
	Flexural strength	EN 196 /ASTM C109	Ca 16 N/mm ²
	E-Modulus	DIN 53504	Ca 7000 N/mm ²
	Shore-Hardness	DIN EN 868	D80 after 28 d
	Water-vapour permeability	DIN 5261523/50-95	$\mu = 4000$
	Adhesive strength	EN ISO 4624	> 2,5 N/mm ² (concrete failure)
	Impact strength	EN 13813	$\geq 4 \text{ Nm}$ (IR4)
	Wear resistance (Taber)	EN ISO 5470-1	$\leq 80 \text{ mg}$
	Low emission	AgBB and M1 and z.B.Green Label Singapur	Fulfilled after 3 days
	Fire Resistance	EN 13501-1	Bfi-S1

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly)– all technical information is subject to change without prior notice

Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de
Seite 2/2 Version Nr. 8 Stand: 09-2026