

VIASOL *UNIVERSAL ESD*


Dissipative, versatile epoxy resin based coating system, with medium mechanical and chemical resistance for the special requirements of EPA, conductivity accord. to DIN EN 61340-5-1, DIN EN 61340-4-1 and DIN EN 61340-4-5.

Application fields

Electronic Industry	Workshops	Laboratories	Pharmaceutical Industry
Production areas	Chemical Industry		

System build-up

VIASOL PU-S6005 P ESD SEALER	
VIASOL EP-C3044 ESD SELF-LEVELLING COATING	
VIASOL EP-E1480 CONDUCTIVE LAYER	
VIASOL EP-C3000 SCRATCH COAT	
VIASOL EP-T703 PRIMER	

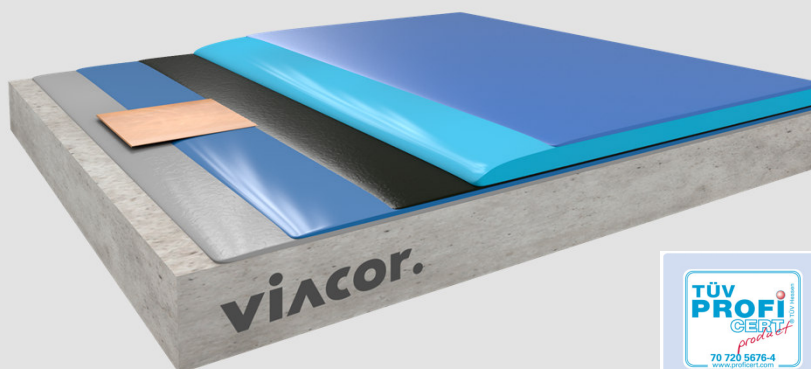

System highlights

2.0 – 5.0 mm System thickness



Capable of bearing high loads



High abrasion resistance



Low-emission in accordance with the criteria of the Committee for the Health Assessment of Building Products (AgBB)



Hygienic (ISEGA certified)




Good chemical resistance



Dissipative acc. to ESD requirements

System pictures

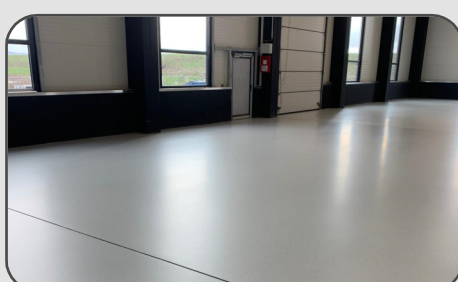


VIASOL *UNIVERSAL ESD*

Application and Consumption

Layer	Product	Consumption (kg/m ²)	Sand broadcasting (mm)	Thickness (mm)	Application
Optional: ESD sealer	VIASOL PU-S6005 P ESD	0,13 – 0,18	none	0,1 – 0,14	Microfiber roller
Dissipative self-levelling coating	VIASOL EP-C3044 ESD	1,8 – 2,5	none	1,5 – 2,0	notched trowel or squeegee (+ spike roller)
Conductive layer incl. copper tape	VIASOL EP-E1480	0,08 - 0,1 Inkl. 20% water	none	0,06 – 0,08	roller, squeegee + roller
Scratch coat, levelling layer (recommended)	VIASOL EP-C3000 (filled with 10-20% VIASOL QNV0)	0,8 – 2,0 (+ 0,08 – 0,4 QNV0)	none	0,5 – 2,0	trowel or rubber squeegee / notched trowel or notched squeegee
Primer	VIASOL EP-T703	0,3 – 0,5	Optional QS (0,3-0,8 mm) Ca. 0.5	0,2 – 0,3	Rubber squeegee, roller
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength ≥ 1.5 N/mm ² , residual moisture content < 4 %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

Technical data

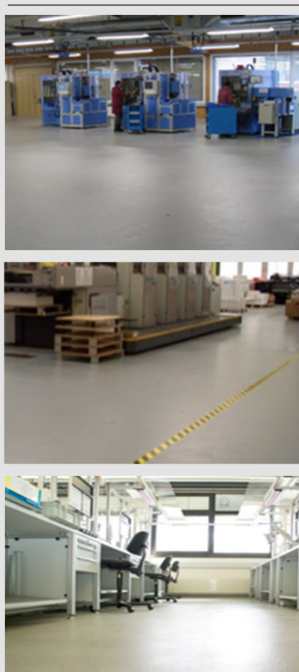	Property	Standard	Result
	Compressive strength	EN 196 / ASTM C109	Ca. 70 N/mm ²
	Flexural strength	EN 196 / ASTM C109	Ca. 40 N/mm ²
	Conductivity (Dissipative)	EN 61340-5-1 (2008 / 2017) EN 61340-4-1 (2016) EN 61340-4-5 (2005) EN 61340-4-5 (2017)	$\leq 10^9 \Omega$ (Rg) < $3.5 \times 10^7 \Omega$ (Rs) (Shoe-Person-Floor) < $1 \times 10^9 \Omega$ (Rs) (Shoe-Person-Floor) < 100 Volt (body voltage)
	Shore-Hardness	EN ISO 868	D 58 after 28 d
	Adhesive strength	EN ISO 4624	> 2,5 N/mm ² (concrete failure)
	Impact strength	EN 13813	≥ 4 Nm (IR4)
	Wear resistance (Taber)	EN ISO 5470-1	≤ 55 mg
	Chemical resistance	EN ISO 2812-1	Test liquids 3, 10, 11 (more see chemical resistance list)
	Solvent free / Total solid	Test method „Deutsche Bauchemie“	≤ 1 % (not valid for water based seal coat)
	Fire resistance	DIN EN 13501-1	B _{fl} -s1

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice

Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de
Seite 2/2 Version Nr. 5 Stand: 09-2026