

PORPLASTIC TENNIS

comfort FlexBase

Tennis court flooring system, Asphalt replacement layer included, ITF certified



Low maintenance


Equal ball reflection



Asphalt replacement layer

Application fields

Tennis courts indoor/ outdoor

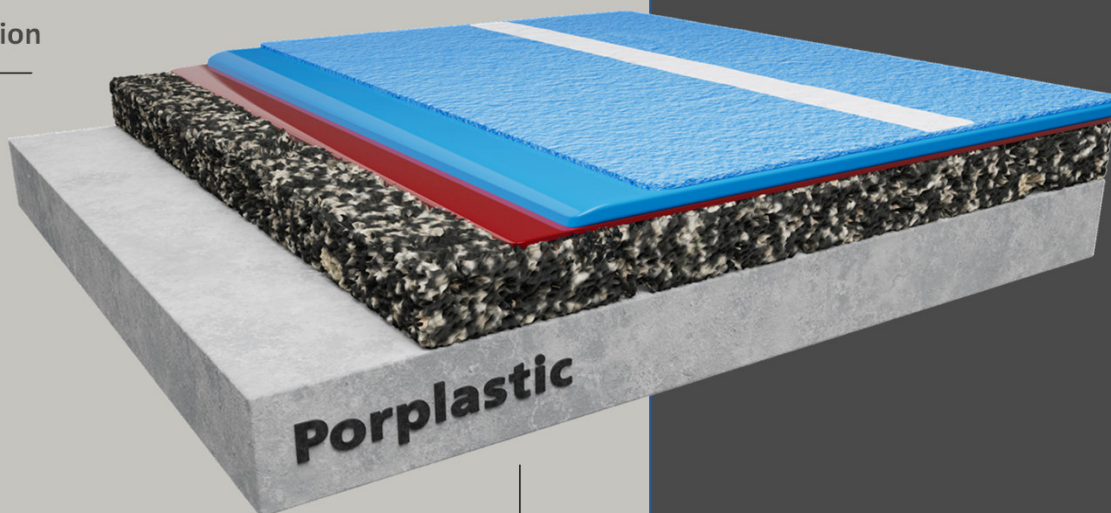

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de



Application and Consumption

LAYER	Consumption	Thickness	Tool
LINE PAINT PORPLASTIC X8085 SR 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Roller or Brush
STRUCTURED TOP FINISH PORPLASTIC S6095 SR 	150 - 200g per Layer (in 2 Layers)	0,3 mm	Rubber Squeegee
SELF LEVELLING LAYER PORPLASTIC C524 	ca. 4 kg/m ² (1kg/m ² + 3kg/m ²)	ca. 3 mm	Notched Squeegee
PORE SEALER PORPLASTIC L370 	ca. 2 kg/m ²	ca. 1 mm	Rubber Squeegee
ASPHALT REPLACEMENT LAYER PORPLASTIC T775 PORPLASTIC GRANULES (1-4mm) PORPLASTIC CHIPS (2-5mm) 	ca. 3 kg/m ² ca. 11 kg/m ² ca. 21 kg/m ²	ca. 35 mm	Paving Machine/ Trowel

Performance-Check

 Asphalt replacement layer	 best in scratch and abrasion resistance	 Low maintenance
 available in many colours	 easy to clean	 equal ball reflection
 Water impermeable	 shock absorption of around 28 %	 ITF certified

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **July 2025** – all technical information is subject to change without prior notice

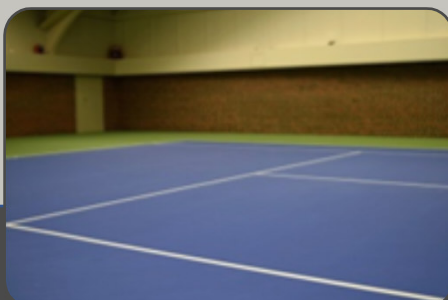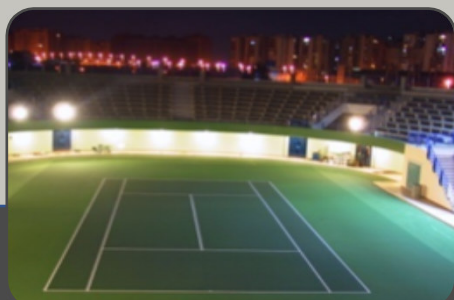

Manufacturers:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de
 Page 2/2 | Version No. 1 | Date: 07-2025