

PORPLASTIC *ACTIVE court*

Only one layer/ water-permeable/ available in many colors

THE FAST AND SIMPLE MULTI COURT



Extremely abrasion
resistance

Water permeable



Available
in many colors

Application fields

Tennis courts

Simple small fields


Multi purpose fields

Decorative areas

Ideal for revitalisation

Porplastic

The sports brand by **viacor.**

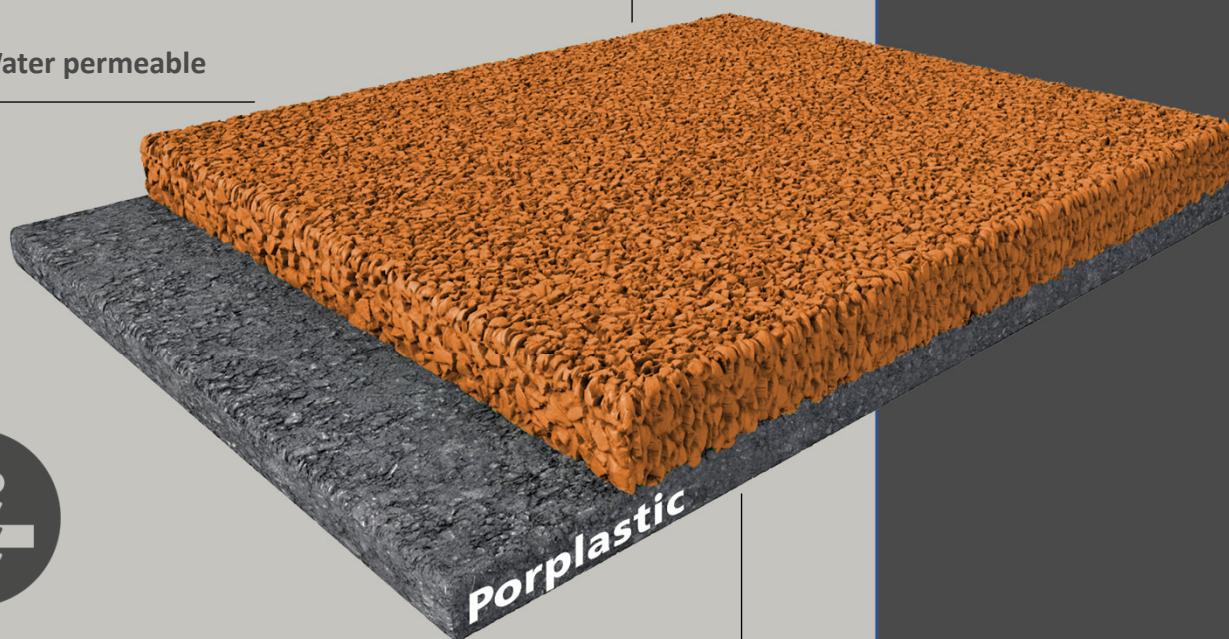

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8090 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Spray
UV-SEALER (optional) PORPLASTIC S6020 (SR) 	0,17 – 0,2 kg/m ² per layer	0,1 – 0,2 mm	Spray, in 2 layers
BASE-LAYER PORPLASTIC T770 PORPLASTIC EPDM (1-4mm) 	2 – 4 kg/m ² 10 – 20 kg/m ²	10 – 20 mm	Paving-machine
PRIMER VIASOL EP-P270 (asphalt) VIASOL EP-P210 (concrete) 	0,15 – 0,2 0,3 -0,5	ca 0,1	Roll or spray

Performance-Check



resistance to wear of 1,47g



shock absorption 34%



elongation at break 52%

tensile strength
0,62 N/mm²friction of dry: 103
wet:56

reflexion 101%

Vertical deformation of
1,7 mm

UV resistant



available in many colours



Water permeable



weather resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) - all technical information is subject to change without prior notice



Manufacturerr:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de
 Seite 2/2 | Version Nr. 4 | Stand: 08-2026