


PORPLASTIC ACTIVE *fitness*

Heavy weight, fitness and yoga-courses plus easy to clean:
The system combines the most important advantages



Step sound isolation

Easy to clean



Permanent elasticity

Application fields

Fitness centers


Cross-Fit_Halls

Heavy weight lifting areas

Workout areas

Porplastic

The sports brand by **viacor**.

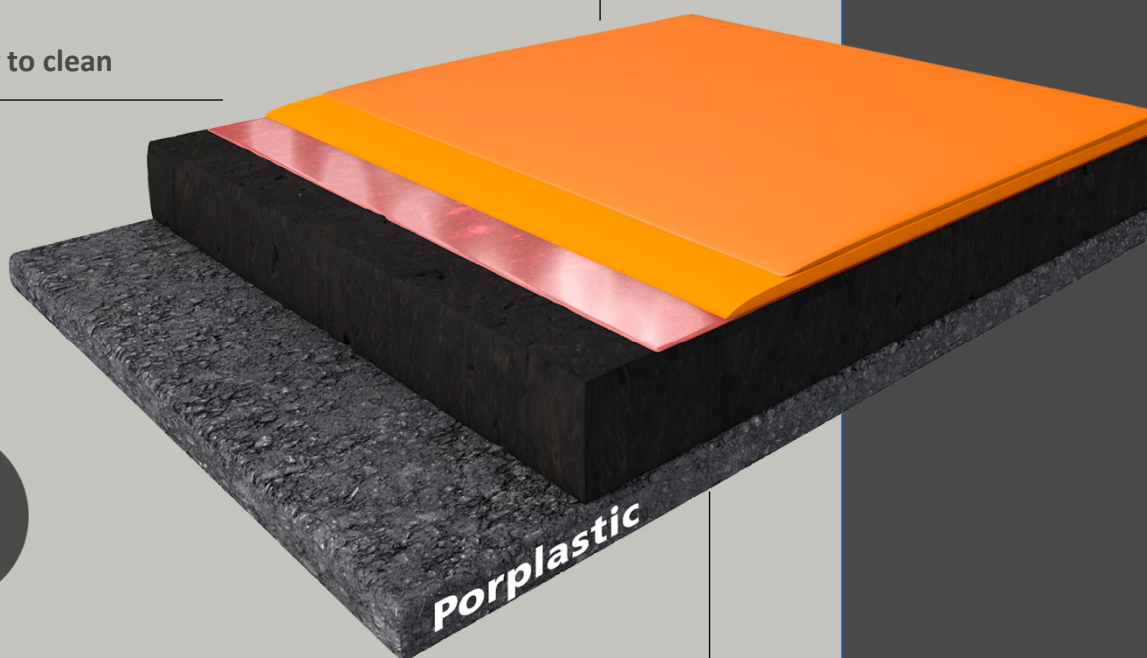

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,15 kg/m ²	0,1 mm	Roller or brush
SELF-LEVELLING LAYER PORPLASTIC C524 	ca 4 kg/m ² (2 layers)	3 mm	Notched trowel
PORE SEALER PORPLASTIC L375 	0,4 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIC MAT+ADHESIVE PORPLASTICfitness PORPLASTIC B976 	- 0,6 – 0,8 kg/m ²	6 – 10 mm -	Cut and embed in fresh adhesive Notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check



good abrasion resistance



step sound insulation of 15 – 18 dB



Elongation at break of min.80%

Tensile strength of min. 1,5 N/mm²

Temperature range of - 30°C bis 80°C



permanent elasticity



easy to clean




fire resistance Efl (B2)



available in many colours

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice

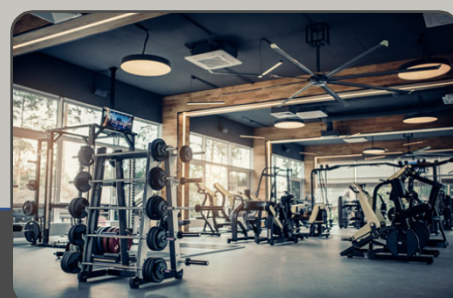

Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de