

SYSTEM DATA SHEET

PORPLASTIC *FUN 100*


elastic and decorative surfaces for playgrounds, critical fall height 2,70 m

JOINTLESS AND DECORATIVE- PROTECTION FOR VERY BIG FALL HEIGHTS



Critical fall height = 2.70m

Hygienic

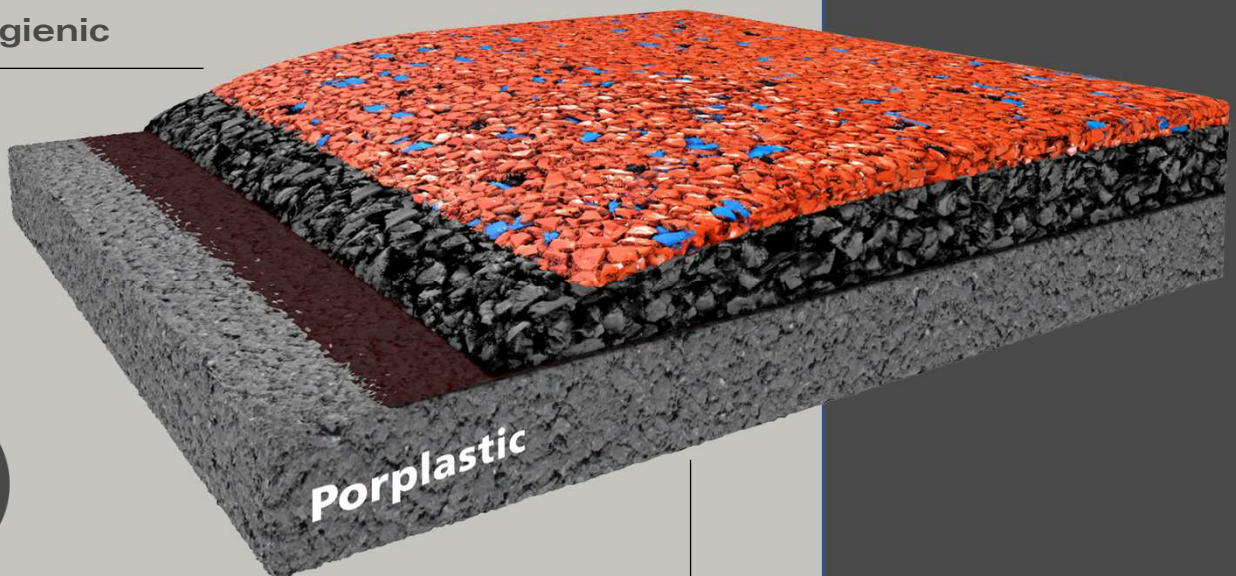

Creative use of colors

Application fields

Play zones in schools

Leisure parks

playground with high monkey bars, climbing frames and swings



Porplastic

The sports brand by **viacor.**



Porplastic Sportbau von
Cramm GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg





Tel. 07472 94 999-0

Fax 07472 94 999-39

info@porplastic.de

www.porplastic.de

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	APPLICATION
WEARING LAYER PORPLASTIC T760/ T770 PORPLASTIC EPDM (1-4mm) 	2 – 3 kg/m ² 10 – 15 kg/m ²	10 – 15 mm	Manuel or paving machine
HIGHLY ELASTIC LAYER PORPLASTIC T770/ T776 PORPLASTIC SBR (2-8mm) 	ca. 5,4 kg/m ² ca 57 – 60 kg/m ²	ca. 90 mm	Manuel or paving machine
PRIMER PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray
PRIMER PORPLASTIC P274 (for concrete) 	0,1 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray

Performance-Check



available in many colours



easy to care with high pressure stream heater



Hygienisch



UV-sealer recommended for sensitive colours



jointless



total thickness of system 100 - 105 mm



critical fall high 2,70 m



tested according DIN EN 1177:2018



excellent shock absorption when fall



water-permeable



Weather resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all PORPLASTIC data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: **January 2022** – all technical information is subject to change without prior notice

