

## SYSTEM DATA SHEET

# PORPLASTIC *FUN 120*


elastic and decorative surfaces for playgrounds, critical fall height 3,23 m

# THE ULTIMATE PROTECTION - JOINTLESS AND DECORATIVE



Critical fall height = 3.23m

Hygienic

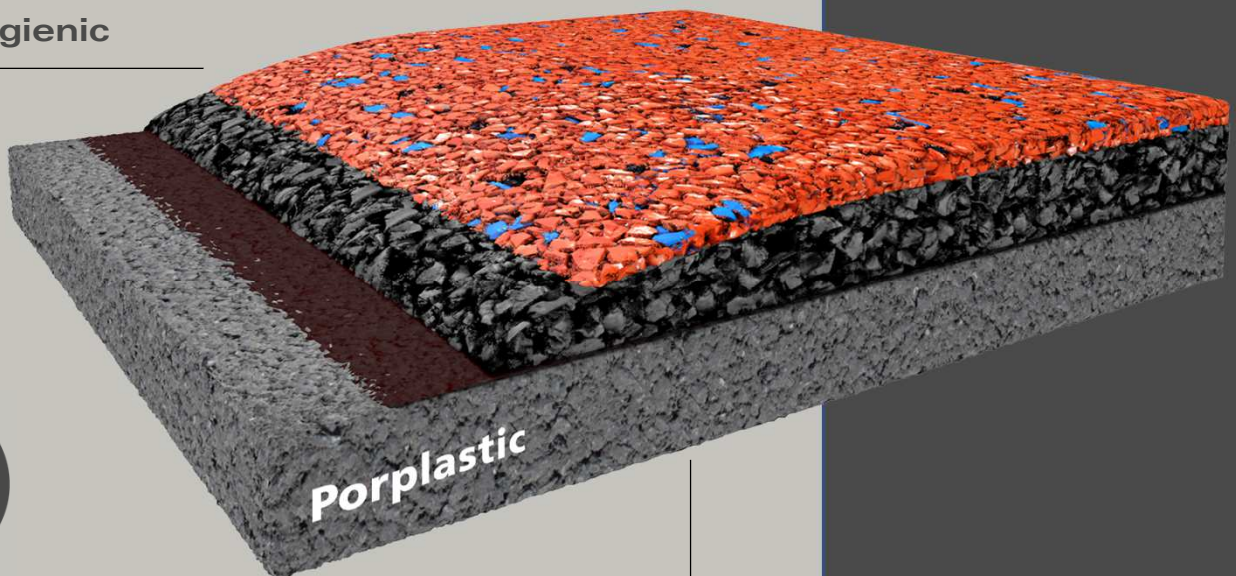

Creative use of colors

Application fields

Play zones in schools

Leisure parks

playground with high monkey bars, climbing frames and swings



**Porplastic**

The sports brand by **viacor.**



Porplastic Sportbau von  
Cramm GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg





Tel. 07472 94 999-0

Fax 07472 94 999-39

[info@porplastic.de](mailto:info@porplastic.de)

[www.porplastic.de](http://www.porplastic.de)

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	APPLICATION
<b>WEARING LAYER</b> PORPLASTIC T760/ T770 PORPLASTIC EPDM (1-4mm) 	2 – 3 kg/m <sup>2</sup> 10 – 15 kg/m <sup>2</sup>	10 – 15 mm	Manuel or paving machine
<b>HIGHLY ELASTIC LAYER</b> PORPLASTIC T770/ T776 PORPLASTIC SBR (2-8mm) 	ca. 6,6 kg/m <sup>2</sup> ca 70 – 73 kg/m <sup>2</sup>	ca. 110 mm	Manuel or paving machine
<b>PRIMER</b> PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m <sup>2</sup>	ca. 0,1 mm	Roll or spray
<b>PRIMER</b> PORPLASTIC P274 (for concrete) 	0,1 – 0,2 kg/m <sup>2</sup>	ca. 0,1 mm	Roll or spray

Performance-Check

-  available in many colours
-  easy to care with high pressure stream heater
-  Hygienic
-  UV-sealer recommended for sensitive colours
-  jointless
-  total thickness of system 120 - 125 mm
-  critical fall high 3,23 m
-  tested according DIN EN 1177:2018
-  excellent shock absorption when fall
-  water-permeable
-  Weather-resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all PORPLASTIC data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see [www.porplastic.com](http://www.porplastic.com) or contact us directly). Date of issue: **January 2022** – all technical information is subject to change without prior notice

