

SYSTEM DATA SHEET

PORPLASTIC *INDOOR CEL combi*

Combined elastic sports flooring system for school and multipurpose use, according to EN 14904, for indoor use



Porplastic

The sports brand by **viacor**.




EN14904 certified

Low emissions



Many colours

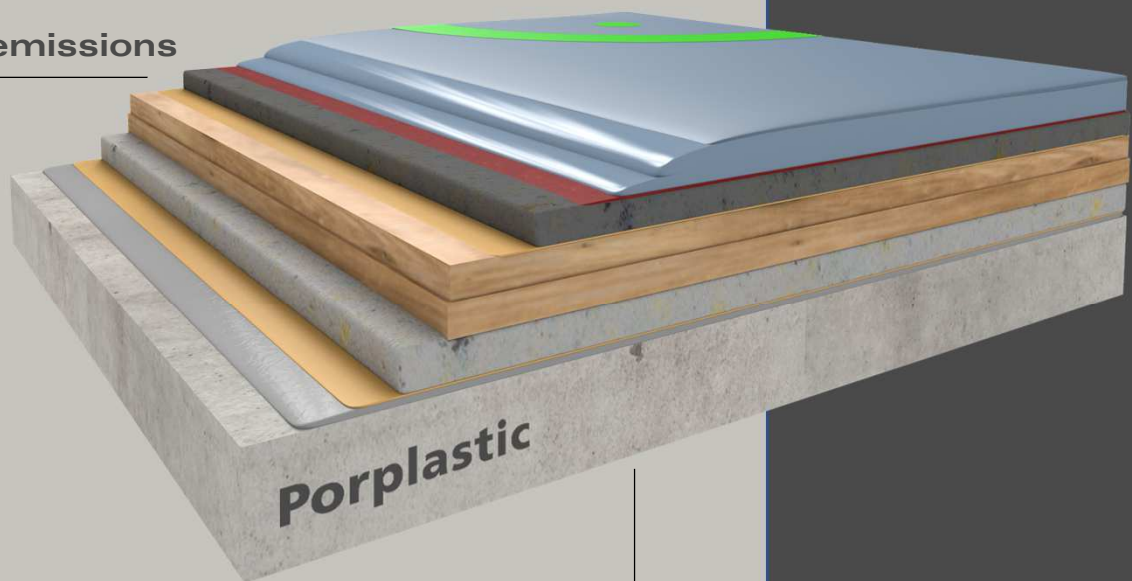

Application fields

Sports halls

School sports halls

Multi-purpose leisure halls

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de


Application and Consumption

LAYER	Consumption	thickness	Application
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Roller or brush
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,12 – 0,15 kg/m ²	0,1 mm	roller
SELF-LEVELLING LAYER PORPLASTIC C524 	2,0 – 3,0 kg/m ²	2 – 3 mm	Notched squeegee
PORE SEALER PORPLASTIC L375 	ca 0,6 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIKMAT + ADHESIVE PORPLASTIC PEL-Matte  PORPLASTIC B976	ca 0,8 kg/m ² (adhesive)	4 - 10 mm (Elastic mat)	Cut and embed in fresh adhesive Notched trowel
UNDER-CONSTRUCTION PLYWOOD  FOAM PAD	-	15 mm	Laid in plates or as roll

Performance-Check

-  Gloss of 32 %
-  Ball rebound > 90
-  shock absorbtion > 55 %
-  Vertical deformation > 2,9 mm
-  abrasion resistance of 20mg
-  available in many colours
-  Water impermeable
-  low emissions
-  DIN EN 14904 certified

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

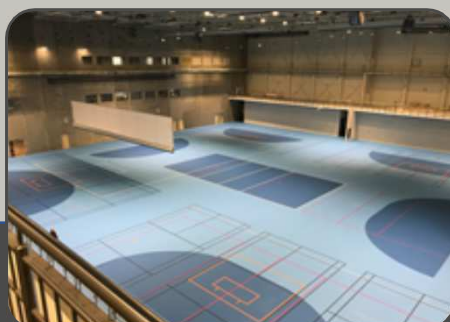

Manufacturrer: