

PORPLASTIC RACE *M olympic gold*

Massive, One or Multilayer Full PU-Bound System. All Layers with Coloured and Virgin Rubber-Granules, Water-Impermeable

WORLD-CLASS SPORT SURFACE



WA certified

Very durable



Environmentally friendly

Application fields

Running tracks

Run up tracks

Short distance tracks

Athletic sport areas Typ A, B, C

High-performance sport

International competitions

Olympia, world championships

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8090 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Spray
UV-SEALER (optional) PORPLASTIC S6020 (SR) 	0,17 – 0,2 per layer	ca 0,1 mm	Spray, In 2 layers
WEARING LAYER PORPLASTIC C570 RUBBER-GRANULES (1-4mm) 	ca 2,8 kg/m ² 2,8 net 4,0 total	ca 3 - 5 mm	Notched squeegee, broadcast, remove excess
2. CAST COATING PORPLASTIC C570 RUBBER-GRANULES (1-4mm) 	ca 3 kg/m ² 3,0 net 3,5 total	ca 5 mm	Notched squeegee, broadcast, remove excess
1. CAST COATING PORPLASTIC C570 RUBBER-GRANULES (1-4mm) 	ca 3 - 3,5 kg/m ² 3,0 net 3,5 total	ca 5 mm	Notched squeegee, broadcast, remove excess
PRIMER PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	0,1 mm	Roll or spray

Performance-Check



WA-certified
14,5 mm



shock absorption 39%



elongation at break of 63%



Tensile strength of
0,56 N/mm²



friction 74



handle constant toughest stresses by
spikes



vertical deformation of 2,0 mm




resistance to wear of 1,62g



available in many colours

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly) – all technical information is subject to change without prior notice

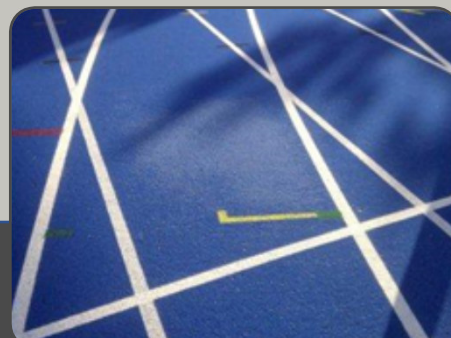

Manufacturer:

VIACOR Polymer GmbH | Graf-Bentzel-Str.78 | 72108 Rottenburg | Germany | Tel: +49 7472 94999-0 | info@viacor.de | www.viacor.de