

SYSTEM DATA SHEET


PORPLASTIC *TENNIS club*

Tennis court flooring system specially designed for concrete sub bases



Easy to clean

Water impermeable

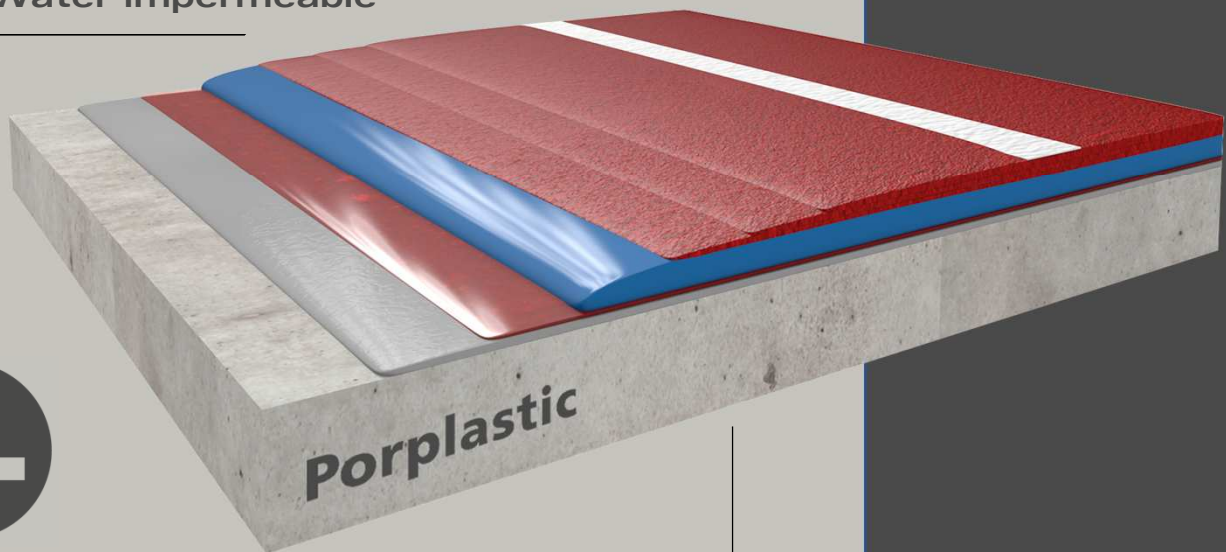

Many colours

Application fields

Tennis courts indoor/ outdoor



Porplastic

The sports brand by **viaCOR.**



Sportbau von Gramm GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg






Tel. 07472 94 999-0

Fax 07472 94 999-39

info@porplastic.de

www.porplastic.de


Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8085 SR 	20 – 30 g per Running meter	ca. 0,1 – 0,2 mm	Roller or brush
STRUCTURED TOP FINISH PORPLASTIC S6085 SR 	2 layers 540g 3 layers 900g	0,3 mm 0,5 mm	Rubber squeegee
SELF LEVELLING LAYER PORPLASTIC C524 	ca 2000 g/m ²	1,5 mm	Notched squeegee
SCRATCH LAYER (optional) PORPLASTIC C524 	200-400 g/m ²	0,2 mm	Notched squeegee
PRIMER (concrete) VIASOL EP-P210 GEBA 	400 g/m ² 300 g/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

-  Water impermeable
-  good scratch and abrasion resistance
-  equal ball reflection
-  available in many colours
-  Easy to clean
-  very durable
-  permanent elasticity
-  low maintenance

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all PORPLASTIC data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: **January 2022** – all technical information is subject to change without prior notice

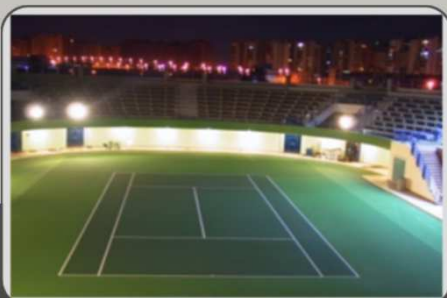

Manufacturer: