

SYSTEM DATA SHEET

Porplastic

The sports brand by **viacor**.

PORPLASTIC *INDOOR PEL* *extra*


Flooring system with extra shock absorption - increased safety of children or athletes in sports halls - point-elastic according to EN 14904



DIN 18032-2 and
EN 14904 certified



TÜV-PROFICERT

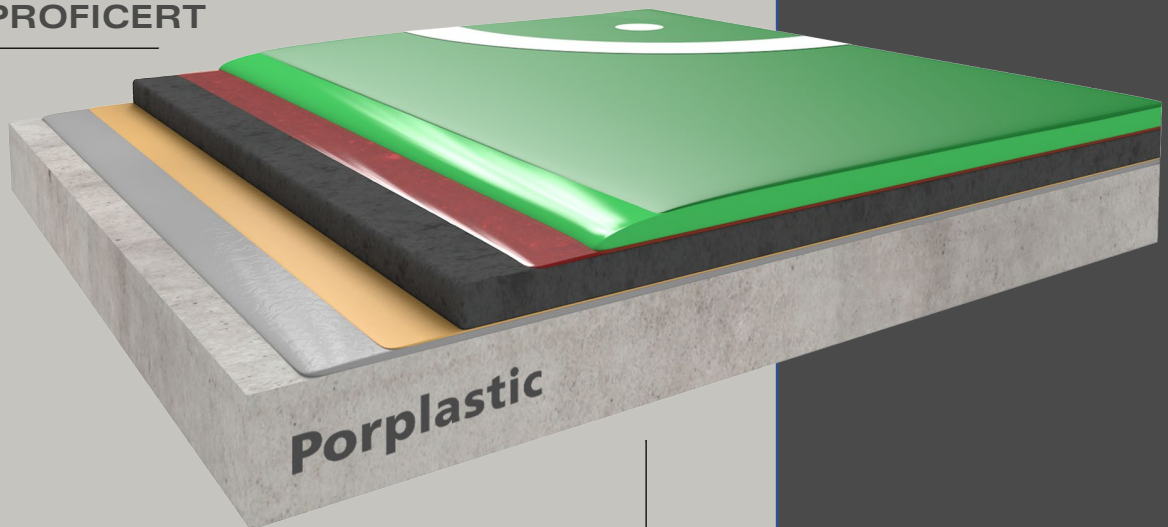

Many colours

Application fields

Sports halls

School sports halls

Multi purpose leisure halls

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de

Application and Consumption

LAYER	CONSUMPTION	THICKNESS	TOOL
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Brush or roller
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,12 – 0,15 kg/m ²	0,1 mm	roller
ELASTIC LAYER PORPLASTIC C524 	2,0 – 3,0 kg/m ²	2 – 3 mm	Pin rake
SELF-LEVELLING LAYER PORPLASTIC C524 	0,4 – 0,8 kg/m ²	ca 0,5 mm	Rubber squeegee
PORE SEALER PORPLASTIC L375 	ca 0,3 – 0,7 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal towel
ELASTICMAT+ADHESIVE PORPLASTIC MAT _(extra) PORPLASTIC B976 	ca 0,8 kg/m ² (Adhesive)	4 – 10 mm (Elastic mat)	Cut and embed in fresh adhesive, notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

-  Gloss of 23 %
-  vertical ball > 95%
-  shock absorption of 29-39%
-  permanent elasticity
-  resistance to wear of 30mg
-  available in many colours
-  Water impermeable
-  impact resistance of 12 - 15 Nm
-  Sliding properties of 90

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

