


# PORPLASTIC *RedClay pro*

Tennis court with clay-feeling, outdoor and indoor with special clay



**Excellent sliding properties**

**Low maintenance**

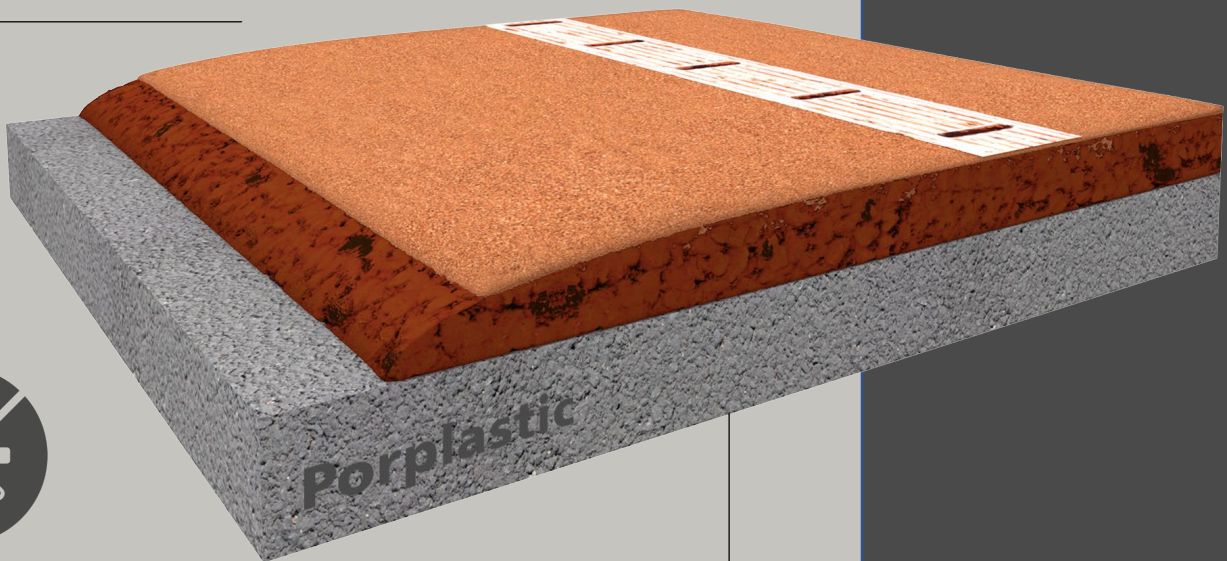

**Playable all year**



Application fields

Tennis halls indoor/ outdoor

Multi purpose fields

Tennis courts in air halls

Weelchair tennis

Ideal for renovation

Multi purpose halls

**VIACOR Polymer GmbH**

Graf-Bentzel-Str. 78

72108 Rottenburg


Tel. 07472 94 999-0

Fax 07472 94 999-39

[info@viacor.de](mailto:info@viacor.de)

[www.viacor.de](http://www.viacor.de)

Application and Consumption

| LAYER   | Consumption   | Thickness      | Application             |
|---|---|----------------|-------------------------|
| <b>TOP LAYER Outdoor</b><br>PORPLASTIC RedClay Top   | Ca 4 – 4,8 kg/m <sup>2</sup>  | ca. 0 – 2 mm   | Broadcast homogeneously |
| <b>TOP LAYER Indoor</b><br>PORPLASTIC RedClay Pur slide                                      | ca. 4 kg/m <sup>2</sup>   | ca. 0 - 1 mm   | Broadcast homogeneously |
| <b>PVC LINE</b><br>PORPLASTIC T772   |   |                | Miling for line marking |
| <b>BASE LAYER Outdoor</b><br>PORPLASTIC T772 <br>PORPLASTIC RedClay basic chippings/ SBR/ QS | 2,9 – 3,8 kg/m <sup>2</sup><br>36 – 38 kg/m <sup>2</sup><br>1 – 1.2 kg/m <sup>2</sup> | 30 mm          | paver                   |
| <b>BASE LAYER Indoor</b><br>PORPLASTIC T772 <br>PORPLASTIC RedClay basic chippings/ SBR/ QS | 2.5 – 3.4 kg/m <sup>2</sup><br>32 – 34 kg/m <sup>2</sup><br>1 – 1.2 kg/m <sup>2</sup> | 25 mm          | paver                   |
| <b>DECOUPLING LAYER</b><br>PORPLASTIC T772 <br>SBR (2-8mm)                                 | 0,5 – 0,8 kg/m <sup>2</sup><br>1.3 – 1.6 kg/m <sup>2</sup>                            | ca. 12 – 15 mm | Roll or spray broadcast |

Performance-Check

-  **playable all year**
-  **excellent sliding properties**
-  **winter resistance**
-  **equal ball reflection**
-  **easy to clean**
-  **no tread holes**
-  **easy on joints and ligaments**
-  **Water permeable**
-  **low maintenance (costs)**

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see [www.viacor.de](http://www.viacor.de) or contact us directly). Date of issue: **January 2024** all technical information is subject to change without prior notice



Manufacturer: