






## VIASOL system data sheet

### VIASOL *DECK 11b plus*


Car park deck coating system with combined membrane and wear coat with enhanced crack bridging properties (class B 3.2) for multi storey car parks in intermediate decks with pedestrian and vehicle traffic. In accordance with DIN EN 1504-2 and DIN V 18026, class OS 11b/OS Fb.

#### SYSTEM BUILD-UP

-  Line marking:  
e.g. PU or acrylic
-  Top coat, seal coat:  
VIASOL EP-S602 or PU-S650
-  Membrane and wear coat:  
VIASOL PU-L300M  
broadcasted with QS 0.3-0.8
-  optional: Scratch coat, levelling coating  
VIASOL EP-P210 or EP-T703 (if necessary)
-  Primer for cementitious substrates:  
VIASOL EP-T703 or others
-  Substrate: concrete, cementitious screed  
and others

#### SYSTEM THICKNESS

4.5 – 5.5 mm

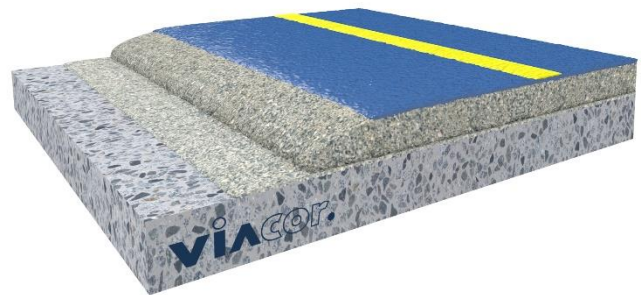


#### SYSTEM HIGHLIGHTS

- Combined membrane and wear coat
- Approved according to DIN EN 1504-2 and DIN V18026, class OS 11b, BAST listed OS Fb
- Crack bridging class B3.2

#### APPLICATION FIELDS

- Intermediate decks
- Covered top decks
- Sidewalks on bridges

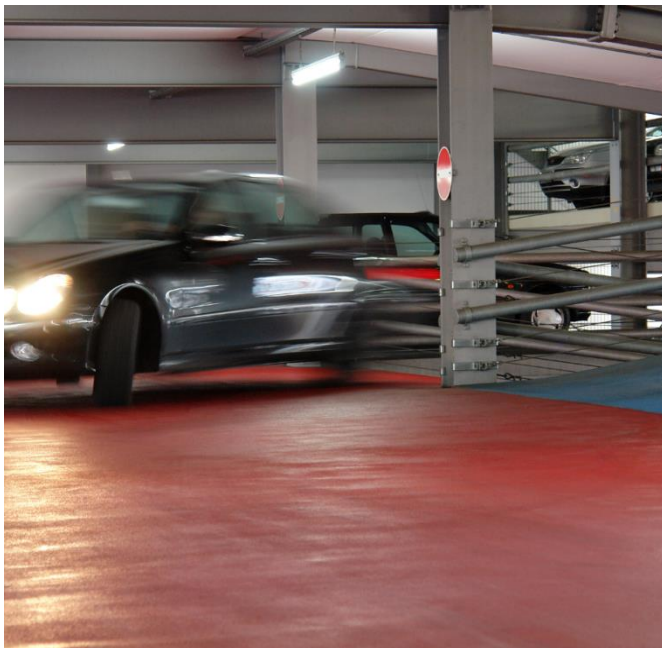

#### SYSTEM BENEFITS

- Dynamic crack bridging acc. to EN 1062-7 class B3.2 (-20°C)
- Seamless application for reliable waterproofing
- Combined membrane and wear coat
- High abrasion resistance
- Good chemical resistance (oil, de-icing salt, petrol, diesel)
- Slip resistant surface for car traffic and pedestrian traffic
- Available in many colours
- Very high color and UV-stability with PU coat
- Fire resistance class B<sub>fi</sub>-s1
- suitable as a waterproofing of roofs and balconies according to DIN 18531-5

#### Manufacturer:

## VIASOL system data sheet

### VIASOL *DECK 11b plus*

#### APPLICATION AND CONSUMPTION

layer	product	consumption (kg/m <sup>2</sup> )	sand broadcasting (kg/m <sup>2</sup> )	thickness mm	application
Seal coat, color- and UV-resistant optional	VIASOL PU-S650	0.6 – 0.9	none	0.5 – 0.7	rubber squeegee, roller for finish
Seal coat	VIASOL EP-S602	0.6 – 0.9	none	0.5 – 0.7	rubber squeegee, roller for finish
Wear coat (HWO1)	VIASOL PU-L300M + 30 % QS 0.1-0.4 mm	2.0 – 2.3 + 30 % QS	QS 0.3-0.8 or 0.6-1.2 mm in excess	min. 4.0	notched trowel
Levelling layer/scratch coat optional	VIASOL EP-T703 + filler QS 0.1 – 0.4	0.5 – 1.5 + QS 25–150 %	QS 0.3-0.8 mm in excess	0.5 – 1.5	notched trowel, roller for finish
Primer	VIASOL EP-T703	0.3 - 0.5	QS 0.3-0.8 mm 0.5 – 0.8	ca. 0.3	roller or rubber squeegee
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength $\geq 1.5 \text{ N/mm}^2$ , residual moisture content $< 4 \text{ \% -CM}$ , with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

#### TECHNICAL DATA

property	standard	result
Adhesive strength at T <sub>NORM</sub>	EN 1542	$\geq 2.3 \text{ N/mm}^2$ ( $\geq 1.5 \text{ N/mm}^2$ )
Adhesive strength after freeze-thaw with de-icing salt	EN 13687-1 and -2	$\geq 1.7 \text{ N/mm}^2$ ( $\geq 1.5 \text{ N/mm}^2$ )
Dynamic crack bridging (-20°C)	EN 1062-7	II T <sub>+V</sub> (B3.2)
Grip and slip resistant	EN 13036-4 DIN 51130	60 Skt ( $\geq 55 \text{ Skt}$ ) R11-V4 and R12-V6
Chemical resistance	EN 13529	Test liquids DiBT no. 1, 3, 10
Abrasion resistance (H22 wheel)	EN ISO 5470-1	1.270 mg /1000 U ( $\leq 3.000$ )
Carbon dioxide permeability	EN 1062-6	class III $> 1.200 \text{ m}$ ( $> 50 \text{ m}$ )
Water vapour permeability	EN ISO 7783-1 and -2	class III $> 200 \text{ m}$ ( $> 50 \text{ m}$ )
Water absorption coefficient	EN 1062-3	$< 0,01 \text{ kg/m}^2 \times \text{h}^{0.5}$ ( $< 0,1$ )
Impact resistance	EN ISO 6772-2	4 Nm – no cracks
Fire behaviour class system	EN 13501-1	B <sub>fl</sub> -s1

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see [www.viacor.de](http://www.viacor.de) or contact us directly)– all technical information is subject to change without prior notice

#### Manufacturer:

VIACOR Polymer GmbH, Graf-Bentzel-Str.78, D-72108 Rottenburg,  
Page 2/2

Tel: +49/7472-94999-0, [info@viacor.de](mailto:info@viacor.de), [www.viacor.de](http://www.viacor.de)  
issue: 08-2019