



# VIASOL *ELASTIC* comfort


High elastic polyurethane coating system, with impact sound reducing rubber or foam mat, gentle to joints, temperature pleasing to the feet, with good mechanical and chemical properties and a wide colour spectrum.

## Application fields

- |         |                  |              |           |                   |        |
|---------|------------------|--------------|-----------|-------------------|--------|
| Schools | Kindergarten     | Universities | Hospitals | Residential homes | Foyers |
| Shops   | Exhibition areas | Restaurants  | Canteens  | Nursing homes     |        |

## System build-up

- VIASOL PU-S6000 P**  
 SEAL COAT
- VIASOL PU-C525**  
 SELF-LEVELLING COATING
- VIASOL PU-C525**  
 LEVELLING COATING
- VIASOL PU-L375**  
 PORE SEALER
- VIASOL Elastic mat**  
 ELASTIC MAT
- VIASOL PU-B976**  
 ADHESIVE
- VIASOL EP-T703**  
 PRIMER


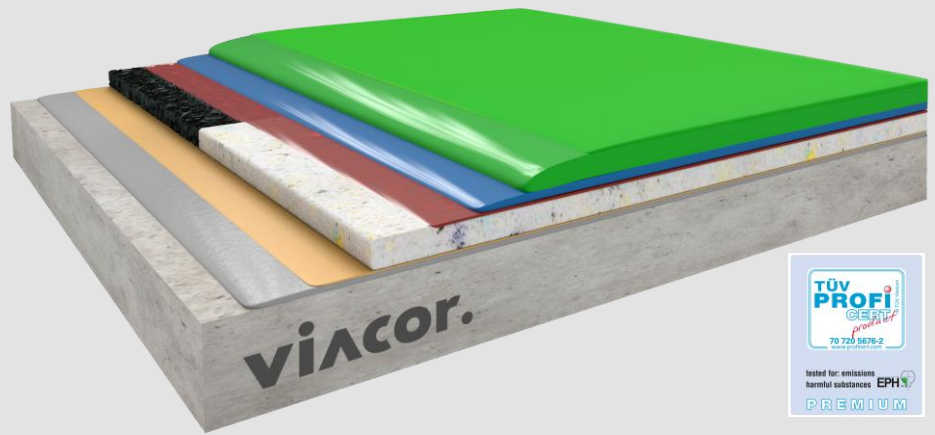


## System highlights

6,0 - 11,0 mm System thickness

- |  |   |
|--|---|
| Impact sound reducing up to 20dB           | Very high color and UV-stability                  |
| Low emission acc. AgBB and other standards | Easy to clean                                     |
| Gentle to knees and joints                 | Hygienic  |
| Suitable for underfloor heating            | Abrasion resistant and suitable for chair castors |

## System pictures

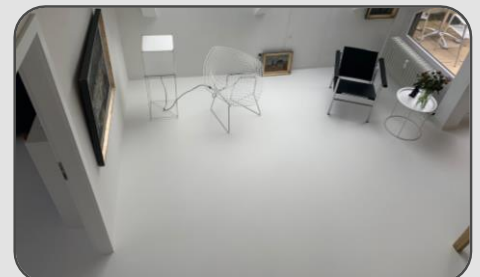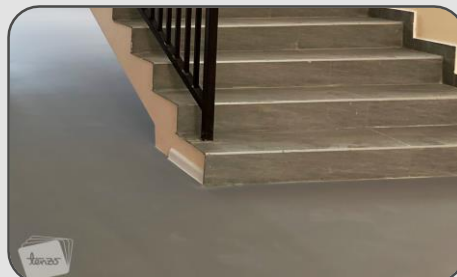



# VIASOL *ELASTIC* *comfort*

## Application and Consumption

Layer	Product	Consumption (kg/m <sup>2</sup> )	Sand broadcasting (kg/m <sup>2</sup> )	Thickness (mm)	Application
Sealer, flexible, pigmented	VIASOL PU-S6000 P	0,10 – 0,13	none	0,08 – 0,10	roller or rubber squeegee and roller
Self-levelling coating, high elastic	VIASOL PU-C525	2,0 – 3,0	none	1,5 – 2,2	notched trowel
(Recommended) Levelling layer	VIASOL PU-C525	0,6 – 1,0	none	ca. 0,5	notched trowel
Pore sealer	VIASOL PU-L375	ca. 1,0	none	0,1 – 0,2	rubber squeegee or trowel
Elastic mat, adhesive	Elastic mat VIASOL PU-B976	4,0 – 6,0 mm ca. 0,8	none	4,0 – 6,0	roll out on fresh adhesive notched trowel
(Optional) Levelling layer	VIASOL PU-C525	0,6 – 1,0	none	ca. 0,5	notched trowel
Primer	VIASOL EP-T703 or others	ca. 0,4	QS 0,3 – 0,8 mm ca. 0,5	ca. 0,3	roller or rubber squeegee
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength $\geq 1.5$ N/mm <sup>2</sup> , residual moisture content $< 4$ %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with VIASOL quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

## Technical data

	Property	Standard	Result
	Tensile strength (coating)	DIN 53504	ca. 9 N/mm <sup>2</sup>
	Elongation at break (coating)	DIN 53504	ca. 200 %
	Tear resistance	DIN 53515	ca. 15 N/mm <sup>2</sup>
	Shore-Hardness	DIN ISO 868	80 A nach 28 d
	Way of use	In relation to DIN EN 685	Private buildings: 23 Public buildings: 34
	Noise reduction	DIN 4109	ca. 12 – 20 dB
	Impact strength	DIN EN 13813	$\geq 4$ Nm (IR4)
	Wear resistance (Taber)	ISO 9352, ASTM D 1044	$\leq 80$ mg
	Anti skid properties	BGR 181 / DIN 51130	Class R9
	Adhesive strength	DIN ISO 4624	$>1,5$ N/mm <sup>2</sup>
	Fire behaviour system	EN 13501-1	Bfl-s1

Remark: For further information, please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see [www.viacor.de](http://www.viacor.de) or contact us directly) – all technical information is subject to change without prior notice.

**Manufacturer:**