PORPLASTIC Pickleball club

Pickleball court flooring system specially designed for concrete sub bases

Easy to clean & low maintenance



The sports brand by **viacor**.












Water impermeable

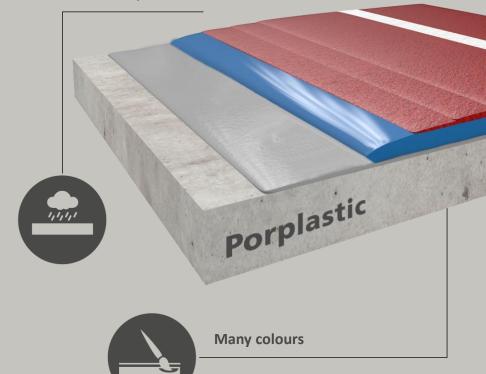

Application fields

Pickleball courts indoor/ outdoor

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

ww.viacor.de

Application and consumption

LAYER

LINE PAINT

PORPLASTIC X8085 SR



STRUCTURED TOP FINISH

PORPLASTIC S6095 SR PORPLASTIC S6085 SR



SELF LEVELLING LAYER

PORPLASTIC C524



SCRATCH LAYER (optional)

PORPLASTIC C524



PRIMER (concrete)

VIASOL EP-P210 **GEBA**



Consumption

20 – 30 g per Running meter

2 layers 540g 3 layers 900g

approx. 2000 g/m²

200-400 g/m²

400 g/m² 300 g/m²

Thickness

approx. 0.1 – 0.2 mm

0.3 mm 0.5 mm

1.5 mm

0.2 mm

approx. 0.2 mm

Application

Roller or brush

Rubber squeegee

Notched squeegee

Notched squeegee

Roller or rubber squeegee

Performance-Check



water impermeable



available in many colours



permanent elasticity



good scratch and abrasion resistance



equal ball reflection



easy to clean



very durable



ow maintenance

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: July 2025 - all technical information is subject to change without prior notice





