

SYSTEM DATA SHEET


PORPLASTIC *INDOOR MEL compound*

Sports flooring system for school and multipurpose use, mixed elastic according to EN 14904



EN 14904 certified

TÜV PROFICERT

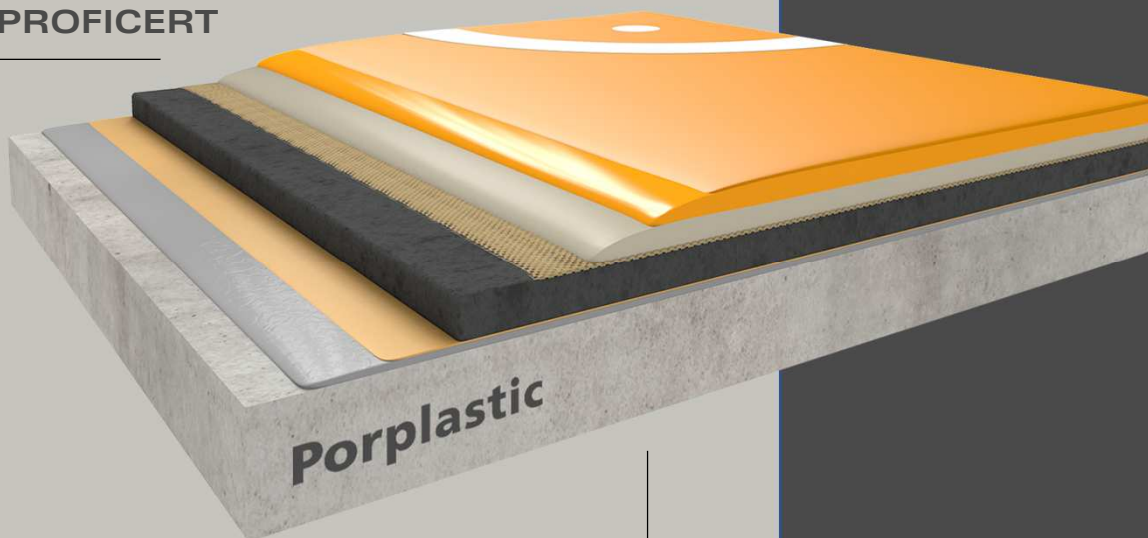

Many colours

Application fields

Sports halls

School sports halls

Multi-purpose leisure halls



Porplastic

The sports brand by **vilcor.**



Porplastic Sportbau von
Cramm GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39










info@porplastic.de

www.porplastic.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Roller or brush
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,10 – 0,13 kg/m ²	0,05 – 0,1 mm	roller
ELASTIC LAYER PORPLASTIC C524 	2,5 – 3,0 kg/m ²	2 – 3 mm	Notched squeegee
LOAD-DISTRIBUTION PORPLASTIC L324 	2,0 kg/m ²	2 mm	Notched squeegee
PORE SEALER PORPLASTIC L375 	ca 1,0 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIC MAT+ADHESIVE PORPLASTIC MAT PORPLASTIC B976 	ca 0,8 kg/m ² (adhesive)	10 – 12 mm (Elastic mat)	Cut and embed in fresh adhesive, Notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

-  gloss of 28-30 %
-  ball rebound > 99%
-  shock absorption of 57 %
-  permanent elasticity
-  abrasion resistance of 15mg
-  available in many colours
-  Water impermeable
-  impact resistance of 16Nm
-  sliding properties of 107

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all PORPLASTIC data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: **January 2022** – all technical information is subject to change without prior notice

